

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
31 July 2003 (31.07.2003)

PCT

(10) International Publication Number  
WO 03/062802 A2

(51) International Patent Classification<sup>7</sup>: G01N 21/47,  
A61B 3/00, G01B 9/02

(72) Inventors; and

(75) Inventors/Applicants (for US only): DE BOER, Johannes, Fitzgerald [US/US]; 60 C Marshall Street, Somerville, MA 02145 (US). TEARNEY, Guillermo, J. [US/US]; 118 Kinnaird Street, #3, Cambridge, MA 02139 (US). BOUMA, Brett, Eugene [US/US]; 12 Monmouth Street, Quincy, MA 02171 (US).

(21) International Application Number: PCT/US03/02349

(22) International Filing Date: 24 January 2003 (24.01.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/351,904 24 January 2002 (24.01.2002) US  
10/136,813 30 April 2002 (30.04.2002) US


(74) Agent: BERNSTEIN, Jason, A.; Bernstein & Associates, P.C., 6600 Peachtree Dunwoody Road, N.E., Embassy Row 400, Suite 495, Atlanta, GA 30328-1649 (US).

(71) Applicant (for all designated States except US): THE GENERAL HOSPITAL CORPORATION [US/US]; 55 Fruit Street, Boston, MA 02114 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,

[Continued on next page]

(54) Title: APPARATUS AND METHOD FOR RANGINGS AND NOISE REDUCTION OF LOW COHERENCE INTERFEROMETRY LCI AND OPTICAL COHERENCE TOMOGRAPHY (OCT) SIGNALS BY PARALLEL DETECTION OF SPECTRAL BANDS

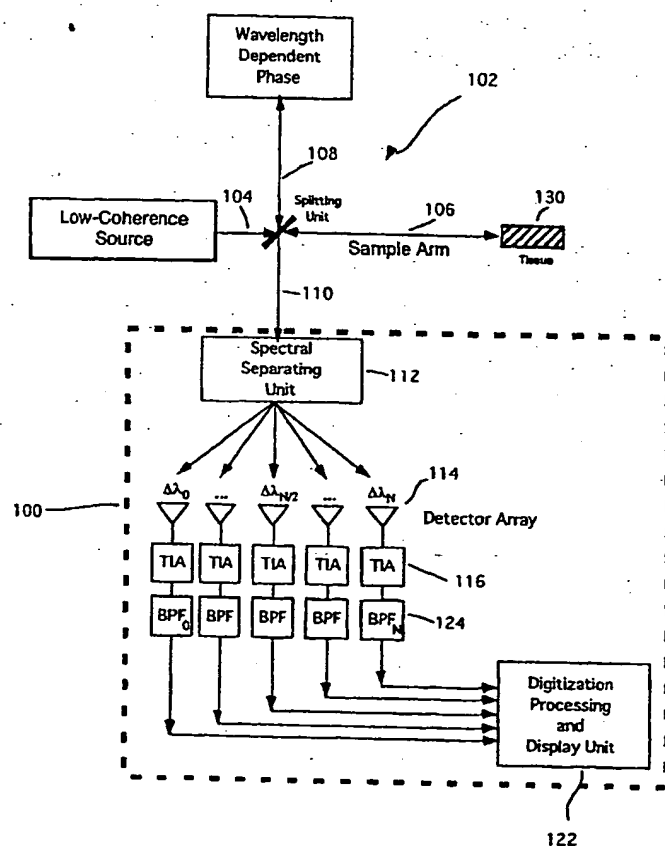

(57) Abstract: Apparatus, method, logic arrangement and storage medium are provided for increasing the sensitivity in the detection of optical coherence tomography and low coherence interferometry ("LCI") signals by detecting a parallel set of spectral bands, each band being a unique combination of optical frequencies. The LCI broad bandwidth source can be split into N spectral bands. The N spectral bands can be individually detected and processed to provide an increase in the signal-to-noise ratio by a factor of N. Each spectral band may be detected by a separate photo detector and amplified. For each spectral band, the signal can be band pass filtered around the signal band by analog electronics and digitized, or, alternatively, the signal may be digitized and band pass filtered in software. As a consequence, the shot noise contribution to the signal is likely reduced by a factor equal to the number of spectral bands, while the signal amplitude can remain the same. The reduction of the shot noise increases the dynamic range and sensitivity of the system.

WO 03/062802 A2

BEST AVAILABLE COPY

**Published:**

— without international search report and to be republished upon receipt of that report

**(84) Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

5

10 APPARATUS AND METHOD FOR RANGINGS AND NOISE REDUCTION OF  
LOW COHERENCE INTERFEROMETRY (LCI) AND OPTICAL COHERENCE  
TOMOGRAPHY (OCT) SIGNALS BY PARALLEL DETECTION OF SPECTRAL  
BANDS

15

20

CROSS REFERENCE TO RELATED APPLICATION

This application claims benefit of copending U.S. provisional patent application No.  
60/351,904, filed January 24, 2002, entitled APPARATUS AND METHOD FOR  
RANGING AND SHOT NOISE REDUCTION OF LOW COHERENCE  
25 INTERFEROMETRY (LCI) AND OPTICAL COHERENCE TOMOGRAPHY  
(OCT) SIGNALS BY PARALLEL DETECTION OF SPECTRAL BANDS, and

compending U.S. application No. 10/136,813, filed April 30, 2002, entitled METHOD AND APPARATUS FOR IMPROVING IMAGE CLARITY AND SENSITIVITY IN OPTICAL COHERENCE TOMOGRAPHY USING DYNAMIC FEEDBACK TO CONTROL FOCAL PROPERTIES AND COHERENCE GATING, both commonly  
5 assigned to the assignee of the present application, the disclosures of which are incorporated by reference in its entirety herein.

#### FIELD OF THE INVENTION

The present invention relates to apparatus, method, logic arrangement and storage medium for dramatically increasing the sensitivity in the detection of optical  
10 coherence tomography and low coherence interferometry signals by detecting a parallel set of spectral bands, each band being a unique combination of optical frequencies.

#### BACKGROUND OF THE ART

Two methods currently exist to implement depth ranging in turbid media. The first  
15 method is known as Low Coherence Interferometry ("LCI"). This method uses a scanning system to vary the reference arm length and acquire the interference signal at a detector and demodulating the fringe pattern to obtain the coherence envelope of the source cross correlation function. Optical coherence tomography ("OCT") is a means for obtaining a two-dimensional image using LCI. OCT is described by Swanson et al.  
20 in U.S. Pat. No. 5,321,501. Multiple variations on OCT have been patented, but many suffer from less than optimal signal to noise ratio ("SNR"), resulting in non-optimal resolution, low imaging frame rates, and poor depth of penetration. Power usage is a factor in such imaging techniques. For example in ophthalmic uses, only a certain number of milliwatts of power is tolerable before thermal damage can occur. Thus,  
25 boosting power is not feasible to increase SNR in such environments. It would be desirable to have a method of raising the SNR without appreciably increasing power requirements.

A second method for depth ranging in turbid media is known in the literature as spectral radar. In spectral radar the real part of the cross spectral density of sample and  
30 reference arm light is measured with a spectrometer. Depth profile information is encoded on the cross-spectral density modulation. Prior designs for spectral radar is

primarily found in the literature.

The use of spectral radar concepts to increase the signal to noise ratio of LCI and OCT have been described earlier. However, in this description, only the real part of the complex spectral density is measured and the method uses a large number of detector elements (about 2,000) to reach scan ranges on the order of a millimeter. It would be desirable to have a method that would allow for an arbitrary number of detector elements. Secondly, the previously described method uses a single charge coupled device ("CCD") to acquire the data. Since the charge storage capacity is limited, it requires a reduction of the reference arm power to approximately the same level as the sample arm power, giving rise to auto correlation noise on the sample arm light. In addition, since no carrier is generated, the  $1/f$  noise will dominate the noise in this system. Thirdly, even with the short integration times of state of the art CCD technology, phase instabilities in the interferometer reduce fringe visibility of the cross spectral density modulation.

## 15 SUMMARY OF THE INVENTION

The present invention can increase the SNR of LCI and OCT by splitting the LCI broad bandwidth source into a number "N" of spectral bands. In one exemplary embodiment, the N spectral bands are individually detected and processed to provide an increase in the SNR by a factor of N. This increase in SNR enables LCI or OCT imaging by a factor of N times faster, or alternatively allows imaging at the same speed with a source that has N times lower power. As a result, the present invention overcomes two of the most important shortcomings of conventional LCI and OCT, namely, source availability and scan speed. The factor N may reach more than 1,000, and allows construction of OCT and LCI systems that can be more than three orders of magnitude improved from OCT and LCI technology currently in practice.

The present invention improves current data acquisition speeds and availability of sources for OCT. Shot noise is due to the statistical fluctuations of the current that are due to the quantized or discrete electric charges. The reduction of shot noise allows for much lower source powers or much higher acquisition rates. Limitations in current data acquisition rates (approximately 4 frames/sec) are imposed by available source power and availability of fast mechanisms for scanning delay. An increase in the sensitivity of the detection by a factor of 8 would allow real time imaging at a speed

of about 30 frames per second. An increase of the sensitivity by a factor of about 1,000-2,000 would allow for the use of sources with much lower powers and higher spectral bandwidths which are readily available, cheaper to produce, and can generate higher resolution LCI or OCT scans.

- 5 For ophthalmic applications of OCT, the efficient detection preferably allows for a significant increase of acquisition speed. The limitation in ophthalmic applications is the power that is allowed to enter the eye according to the ANSI standards (approximately 700 microwatts at 830 nm). Current data acquisition speed in ophthalmic applications is approximately 100-500 A-lines per second. The power  
10 efficient detection would allow for A-line acquisition rates on the order of about 100,000 A-lines per second, or video rate imaging at about 3,000 A-lines per image.

The gain in SNR is achieved because the shot noise has a white noise spectrum. An intensity present at the detector at frequency  $\omega$  (or wavelength  $\lambda$ ) contributes only to the signal at frequency  $\omega$ , but the shot noise is generated at all frequencies. By  
15 narrowing the optical band width per detector, the shot noise contribution at each frequency can be reduced, while the signal component remains the same.

In summary, the present invention improves a performance of LCI and OCT, and as a result, can be used in developing LCI and OCT diagnostic technologies for medical and non-medical applications.

- 20 Other features and advantages of the present invention will become apparent upon reading the following detailed description of embodiments of the invention, when taken in conjunction with the appended claims.

#### BRIEF DESCRIPTION OF THE DRAWINGS

- 25 The invention is illustrated in the drawings in which like reference characters designate the same or similar parts throughout the figures of which:

Fig. 1 is a schematic view of a conventional system.

Fig. 2 is a schematic view of a preferred embodiment of the parallel detection scheme for LCI.

Fig. 3 is a schematic view of a system with one detector array according to one

embodiment of the present invention.

Fig. 4 is a detail of a probe.

Fig. 5 is a schematic view of separating unit in combination with two integrating CCD arrays for detection of the dual-balanced wavelength demultiplexed signal.

5 Fig. 6 is a schematic view of a preferred embodiment of a standalone system

Fig. 7 is a schematic view showing spectral separating into 2 bands.

Fig. 8 is a schematic of spectral separating into 4 bands. The spectral resolution preferably used for each detector is twice as coarse as in the case of multiplexing into 2 bands.

10 Fig. 9 is a schematic view of using beam recombination to provide one dimension of interference information along one dimension of a two-dimensional detector array, while performing wavelength separating along the other dimension of the two dimensional array.

Fig. 10 is a schematic view of a phase tracking system according to one embodiment  
15 of the present invention.

Fig. 11 is a flowchart depicting the reconstruction of LCI or OCT signal from wavelength bands.

Fig. 12 is a schematic view of a spectral domain OCT interferometer design with a source combining the spectra of several superluminescent sources.

20 Fig. 13 is a schematic view of a system with a four detector array.

Fig. 14 is a graph of a typical interference patten as a function of path length difference between sample arm and reference arm.

Fig. 15 is an embodiment of a phase tracker system with an extended phase lock range.

25 Figs. 15A-C are flow diagrams of a method.

Fig. 16 is a graph of frequency versus OCT power spectrum.

Fig. 17 is a graph of frequency versus amplitude spectrum subtracted from the shot noise (experimental data) for the  $N=1$  (dotted line) and  $N=1/3$  (solid line) cases.

Fig. 18 is a graph of power density for the full spectrum as a function of frequency.

5 Fig. 19 is a graph after subtraction of the shot noise levels.

Fig. 20 is a graph after processing the signals.

Fig. 21 is a graph of the coherence envelope for the coherently summed channels.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

### Overview

10 Certain exemplary embodiments of the present invention include a hybrid method that implements aspects of LCI and OCT where the reference arm is scanned, and spectral radar, which does not require reference arm scanning.

In one embodiment, the signal in the detection arm of an OCT system is split into more than one spectral band before detection. Each spectral band is detected by a  
15 separate photodetector and amplified. For each spectral band, the signal can be band pass filtered around the signal band by analog electronics and digitized, or, alternatively, the signal may be digitized and band pass filtered in software. As a consequence, the shot noise contribution to the signal can be reduced by a factor equal to the number of spectral bands, while output of the signal remains the same. The  
20 reduction of the shot noise increases the dynamic range and sensitivity of the system.

In another exemplary embodiment of the present invention, an apparatus is provided for spectral radar that does not require reference arm scanning. For many detectors, no ranging or reference arm scanning is needed, and the method may be similar to the method which can be employed for a spectral radar except that phase information of  
25 the cross spectral density is preferably preserved.

In other exemplary embodiments, the present invention describes an arrangement for spectral radar that eliminate phase instability in the interferometer, obtaining the complex spectral density and eliminating auto correlation noise on the sample arm



light, relative intensity noise, and  $1/f$  noise.

## THEORY

### TIME DOMAIN VERSUS SPECTRAL DOMAIN OCT

Nearly all conventional OCT systems are based on Time Domain scanning. In such  
5 conventional systems, the length of the reference arm in a Michelson interferometer is  
rapidly scanned over a distance corresponding to the imaging depth range. An  
alternative procedure to scanning the reference arm, is one that measures the cross-  
spectral density at the detection arm of the Michelson interferometer using a  
spectrometer. In Spectral Domain OCT, no mechanical (e.g., motionless) scanning of  
10 the reference arm is required, while an apparatus for generating a phase shift can be  
used. Only recently was it recognized that a significant signal to noise gain can be  
achieved by direct measurement of the cross-spectral density.

Fig. 1 shows a schematic of a conventional Time Domain OCT system. On scanning  
the reference arm path length, interference fringes are formed corresponding to  
15 positions that match the distance to the three structures drawn in the sample volume.  
A single detector is used to detect the interference fringes. By envelope detection of  
the fringe patterns, an image is constructed that maps tissue reflectivity to a given  
location.

Certain exemplary embodiments of the present invention provide a detection principle  
20 based on Spectral Radar concepts (further referred to as Spectral Domain OCT) or a  
hybrid method between Spectral Domain and Time Domain OCT that can be more  
sensitive than current state of the art Time Domain OCT, allowing a substantial  
increase in the acquisition speed to resolution ratio.

#### Principle of shot noise reduction in Spectral Domain OCT

25 The best signal to noise performance of Time Domain OCT systems is obtained when  
the noise is shot noise limited. Shot noise can be reduced significantly by replacing  
the single element detector with a multi-element array detector. When the detection  
arm light is spectrally dispersed on the array detector, each element of the array  
detects a small wavelength fraction of the spectral width of the source. The shot noise  
30 is preferably reduced by a factor equal to the number of elements of the array. The

principle of the signal to noise improvement is based on the white noise characteristic of shot noise and the observation that only electromagnetic waves of the same wavelength produce interference fringes.

The shot noise power density  $N_{shot}(f)$  (in units  $[W/Hz]$ ,  $[A^2/Hz]$  or  $[V^2/Hz]$ ) is proportional to the current (or equivalently the optical power times the quantum efficiency) generated in the detector. For a monochromatic beam of wavelength  $\lambda_1$  entering the interferometer, the fringe frequency or carrier  $f$  at the detector is determined by the velocity  $v$  of the mirror,  $f_1 = 2v/\lambda_1$ . The shot noise is proportional to the power (or spectral density  $S(\omega)$ ) at wavelength  $\lambda_1$ . A second wavelength  $\lambda_2$  is preferably coupled into the interferometer. A second fringe frequency or carrier at frequency  $f_2 = 2v/\lambda_2$  is simultaneously present. The shot noise at this second frequency is preferably the sum of the shot noise generated by the optical power at wavelength  $\lambda_1$  and  $\lambda_2$ . Also, at frequency  $f_1$  the shot noise is the sum of the shot noise generated by the optical power at wavelength  $\lambda_1$  and  $\lambda_2$ . Thus, at both frequencies a cross-shot noise term is generated by the simultaneous presence of both wavelengths at the detector. By spectrally dispersing each wavelength to a separate detector, the cross shot noise term can be eliminated. In this way, Spectral Domain OCT offers a significant improvement of signal to noise ratio over Time Domain OCT systems.

#### Signal to noise analysis of Time Domain versus Spectral Domain OCT.

##### 20 Signal

Analysis of the Signal to Noise Ratio (SNR) in Time Domain OCT has been described in related publications. The interference fringe peak amplitude in time domain OCT is given by

$$I_{peak} = \sqrt{P_{ref}P_{sample}}, \quad (1)$$

25 with  $P_{ref}$ ,  $P_{sample}$  the reference and sample arm power in Watts, respectively. In terms of electrical power at the detector, the signal in units  $[A^2]$  is defined as

$$S = \eta^2 e^2 P_{ref} P_{sample} / E_v^2, \quad (2)$$

with  $\eta$  the quantum efficiency,  $e$  the charge quantum and  $E_v = hc/\lambda$  the photon

energy. The reference and sample arm powers are given by the respective reflected spectral densities,

$$P_{ref, sample} = \int S_{ref, sample}(\omega) d\omega. \quad (3)$$

Assuming that the reference and sample spectral densities are equal to the source spectral density  $S(\omega)$ , where the sample arm spectral density is attenuated by a large factor, i.e.,  $S_{ref}(\omega) = S(\omega)$ ,  $S_{sample}(\omega) = \alpha S(\omega)$  with  $\alpha \ll 1$ , and inserting the above expression of reference and sample arm into the original definition of the signal gives,

$$S = \eta^2 e^2 \alpha \left[ \int S(\omega) d\omega \right]^2 / E_v^2. \quad (4)$$

#### Thermal, shot noise and relative intensity noise contributions

Three contributions to the total noise of OCT signals are: thermal noise, shot noise and relative intensity noise. Thermal noise is generated by the feedback resistor, shot noise is related to the finite nature of the charge quantum resulting in statistical fluctuations on the current, and relative intensity noise is related to the temporal fluctuations due to chaotic character of classical light sources. These three contributions to the noise density in units  $[A^2 / Hz]$  are given by,

$$N_{noise}(f) = \frac{4kT}{R_{fb}} + \frac{2\eta e^2 P_{ref}}{E_v} + 2 \left( \frac{\eta e P_{ref}}{E_v} \right)^2 \tau_{coh}, \quad (5)$$

$k$  is Boltzmann's constant,  $T$  the temperature in Kelvin,  $R_{fb}$  the value of the feedback resistor, and  $\tau_{coh}$  the coherence time of the source. Coherence time is related to the full spectral width at half maximum  $\Delta\lambda$  of a Gaussian source by the following relation,  $\tau_{coh} = \sqrt{2 \ln 2 / \pi} \lambda_0^2 / (c \Delta\lambda)$ . Shot noise limited detection is achieved when the second term in Eq. (5) dominates the other noise contributions.

#### Signal to Noise Ratio (SNR)

The signal to noise ratio (SNR) is given by

$$SNR = \frac{S}{N_{noise}(f)BW}, \quad (6)$$

with  $BW$  the signal bandwidth, and parameters  $S$  and  $N_{noise}(f)$  as described above.

### Space and frequency domain description of the OCT signal

The OCT signal is most easily described in the space domain. For a single object in the sample arm, the interference term of the OCT signal is proportional to the real part of the Fourier transform of the source spectrum  $S(\omega)$ ,

$$I(\Delta z) \propto \text{Re} \int \exp(ik\Delta z) S(k) dk, \quad (7)$$

with  $\Delta z$  the path length difference between sample and reference arm and  $k$  the wave vector. As a function of time, the OCT signal is given by,

$$I(t) \propto \text{Re} \int \exp(2i\omega t v / c) S(\omega) d\omega, \quad (8)$$

with  $v$  the reference arm mirror velocity. The frequency spectrum of the signal is given by a Fourier transform of the signal in the time domain, resulting in a complex function. The absolute value of this function is equal to the spectral density,

$$|I(f)| = \left| \int I(t) e^{2i\pi f t} dt \right| = S(\pi f c / v), \quad (9)$$

which shows that the signal bandwidth is directly proportional to the source spectral width and scales linearly with the reference arm mirror velocity, i.e., imaging speed. Eq. (9) also directly relates the absolute value of the frequency spectrum,  $|I(f)|$ , to the signal  $S$  (Eq. (4)).

Eq (9) also demonstrates that each angular frequency of the light source or equivalently each wavelength of the source is represented at its own frequency in the measured interferometric signal. The depth profile information  $I(t)$  can be obtained from the complex cross spectral density  $I(f)$  by a Fourier transform.

The complex cross spectral density can also be obtained by splitting the signal  $I(t)$  in several spectral bands using a dispersive or interferometric element. At each detector,

only part of the complex cross spectral density is determined. Combining the cross spectral densities of each detector, the full spectral density of the signal is retrieved.

Thus, the same information can be obtained by separating spectral components to individual detectors. Combining the signal of all detectors in software or hardware would result in the same signal as obtained with a single detector.

#### Signal to noise gain with Spectral domain OCT

In the detection arm, the spectrum can be split into two equal halves, where two detectors each detect one half of the spectrum. According to Eq (9), the frequency spectra at detectors 1 and 2 are given by  $|I_1(f)| = S(\pi fc/\nu)$  for  $f < f_0$ ,  $I_1(f) = 0$  for  $f > f_0$  and  $I_2(f) = 0$  for  $f < f_0$ ,  $|I_2(f)| = S(\pi fc/\nu)$  for  $f > f_0$ , respectively. The frequency spectrum as would be acquired by a single detector in time domain OCT is given by the sum of  $I_1(f)$  and  $I_2(f)$ ;  $I(f) = I_1(f) + I_2(f)$ . Thus, the signal  $S$  after combining the spectra is equal, however  $I_1(f) = 0$  for  $f > f_0$  and  $I_2(f) = 0$  for  $f < f_0$ , the bandwidth  $BW$  per detector can be reduced by a factor of 2.

The noise is determined by the sum of the shot noise contributions at detectors one and two. From Eqs. (5) and (6), the shot noise per detector is proportional to the reference arm power at the detector times the bandwidth for the detector. Since the spectrum was split in equal halves, the reference power at detectors 1 and 2 is, respectively,

$$P_{ref}^1 = 0.5P_{ref}, \quad P_{ref}^2 = 0.5P_{ref}. \quad (10)$$

The sum of the shot noise contribution for the two detectors is,

$$N_{noise}^{SD} \propto P_{ref}^1 \times 0.5BW + P_{ref}^2 \times 0.5BW = 0.5P_{ref}BW, \quad (11)$$

which may be compared with the shot noise of a single detector in time domain OCT,

$$N_{noise}^{TD} \propto P_{ref}BW. \quad (12)$$

Thus, by spectrally dispersing the detection arm light over two separate detectors, the signal remains the same, while the noise is reduced by a factor of 2, resulting in a net

SNR gain by a factor of 2.

Extending the above analysis, it can be demonstrated that the shot noise contribution is reduced by a factor equal to the number of detectors. The sum of shot noises for N detector elements, where each detector element receives one  $N^{\text{th}}$  of the total reference power, is given by,

$$N_{\text{noise}} = \frac{2\eta e^2 P_{\text{ref}} BW}{E_v} \cdot \frac{1}{N} \quad (13)$$

The signal is the same as in Time Domain OCT, and the SNR ratio for Spectral Domain OCT is given by,

$$\frac{S}{N_{\text{noise}}} = \frac{\eta P_{\text{sample}} N}{2E_v BW} \quad (14)$$

Thus Spectral Domain OCT enables a SNR improvement over Time Domain OCT of a hundred to a thousand fold, depending on the number of detector elements N. Using a charge coupled array or an integrating device as a detector, such as, but not limited to, a line scan camera, the ratio  $N/BW$  is replaced by the integration time  $\tau_i$  of the array, which results in,

$$\frac{S}{N_{\text{noise}}} = \frac{\eta P_{\text{sample}} \tau_i}{2E_v} \quad (15)$$

### Advantages

The exemplary embodiment of the present invention reduce shot noise and other forms of noise which allows for much lower source powers, or much higher acquisition rates than current systems. The increased detection sensitivity allows for real time imaging. Such imaging speed can help practitioners where motion artifacts are a continuing problem, such as in gastrointestinal, ophthalmic and arterial imaging environments. By increasing the frame rate while maintaining or improving the signal to noise ratio such artifacts can be minimized. The present invention also enable one to screen large areas of tissues with OCT and allows clinical viable screening protocols using this method.

Fig. 2 shows a top level system 100 configuration according to an exemplary embodiment of the present invention, which comprises an interferometer 102 with a source arm 104, a sample arm 106, a reference arm 108, and a detection arm 110 with a spectral separating unit 112, multiple detectors 114, amplifiers 116, optional analog processing electronics 118 (not shown, but known to those skilled in the art), and A/D converters 120 (not shown, but known to those skilled in the art) for conversion of signals. A processing and display unit 122 has optionally digital band pass filtering ("BPF") units 124, Digital Fast Fourier Transforms ("FFTs") 126 (not shown), coherent combination of signals, and data processing and display algorithms. The detector array 114 may be 1xN for simple intensity ranging and imaging and/or Doppler sensitive detection, 2xN for dual balanced detection, 2xN for simple intensity ranging and/or polarization and/or Doppler sensitive detection, or 4xN for combined dual balanced and polarization and/or Doppler sensitive detection. Alternatively, an MxN array may be used for arbitrary number "M" of detectors 114 to allow detection of transverse spatial information on the sample 130.

Fig. 3 shows a schematic of one exemplary embodiment of a Spectral Domain OCT system 200, which includes a light source 202, splitter 204, reference arm 206, sample arm 208, tissue sample 130, optical element 210, grating 212, lens 214, detector 216 array, and processor 218. The detection arm light is dispersed by the grating 212 and the spectrum imaged onto a detector array 216. By stepping the reference arm 206 length over a distance  $\lambda/8$ , the cross spectral density of reference arm 206 and sample arm 208 light can be determined. A Fourier transform of the cross spectral density generates the depth profile information.

#### Sources

The source arm 203 contains at least light source 202 that is used to illuminate the interferometer with low-coherence light. The source temporal coherence length is preferably shorter than a few microns (a preferred range is about 0.5  $\mu\text{m}$  - 30  $\mu\text{m}$ ). Examples of sources include, but are not limited to, semiconductor optical amplifier, superluminescent diodes, light-emitting diodes, solid-state femtosecond sources, amplified spontaneous emission, continuum sources, thermal sources, combinations thereof and the like. Other appropriate sources known to those skilled in the art may be used. While light is referred to herein as the source, it is intended that other electromagnetic radiation ranges may be suitable for use, depending on the

circumstances.

### Interferometer

The sample arm 208 collects light reflected from the tissue sample 130 and is combined with the light from the reference arm 206 to form interference fringes. The  
5 reference arm 206 returns light back to be combined with the source arm 203. The reference arm can also be transmissive with no reflection. This action of beam splitting/recombining may be performed using a beam splitter 204 (Michelson), or circulator(s) (Mach-Zehnder) or other means known to those skilled in the art for separating a beam into multiple paths and recombining these multiple beams in a  
10 manner that interference between the beams may be detected. The splitting may be accomplished in free space or by using a splitter 204 having passive fiber optic or waveguide components.

### Sample arm

For LCI applications, the sample arm may be terminated by an optical probe  
15 comprising a cleaved (angled, flat, or polished) optical fiber or free space beam. A lens (such as, but not limited to, aspherical, gradient index, spherical, diffractive, ball, drum or the like) may be used to focus the beam on or within the sample. Beam directing elements (such as, but not limited to, mirror, prism, diffractive optical element or the like) may also be contained within the probe to direct the focused beam  
20 to a desired position on the sample. For OCT applications, the position of the beam may be changed on the sample as a function of time, allowing reconstruction of a two-dimensional image. Altering the position of the focused beam on the sample may be accomplished by a scanning mirror (such as, but not limited to, a galvanometer, piezoelectric actuator or the like), electrooptic actuator, or moving the optical fiber  
25 (for example, rotating the optical fiber, or linearly translating the optical fiber). The sample arm probe may be a fiber optic probe that has an internally moving element where the motion is initiated at a proximal end of the probe and the motion is conveyed by a motion transducing arrangement (such as, but not limited to, wire, guidewire, speedometer cable, spring, optical fiber and the like) to the distal end. The  
30 fiber optic probe may be enclosed in a stationary sheath which is optically transparent where the light exits the probe at the distal end. Fig. 4 shows a detail view having an inner cable 260 (which may rotate or linearly translate along the axis of the probe), an



outer transparent or semi-transparent sheath 262, distal optics 264, and remitted light 266 (which may be at any angle with respect to axis of catheter).

#### Reference arm delay

5 A mechanism 270 in the reference arm 206 allows for scanning the group delay of the reference arm 206. This group delay can be produced by any of a number of techniques known to those skilled in the art, such as, but not limited to, stretching an optical fiber, free space translational scanning using a piezoelectric transducer, or via a grating based pulse shaping optical delay line. Preferably, the delay is introduced by a non-mechanical or motionless arrangement. By "non-mechanical" it is meant that no  
10 mechanically moving parts are utilized. The absence of mechanically moving parts is believed to reduce the known deficiencies of using mechanical devices to introduce delay. As opposed to traditional LCI or OCT systems described in the literature, the reference arm 206 in the present invention does not necessarily need to scan over the full ranging depth in the sample, and preferably scans over at least a fraction of the  
15 ranging depth equal to one over the number of detectors ( $1/N$ ). This scanning feature is fundamentally different from known delay scanning schemes used in conventional known LCI and OCT systems. The reference arm 206 optionally has a phase modulator mechanism (described more fully herein), such as, but not limited to, an acoustooptic modulator, electrooptic phase modulator or the like, for generating a  
20 carrier frequency. In order to reduce the scan range of the reference arm 206, the spectrum is preferably split into a plurality of spectral bands according to a method that will be explained below.

#### Detection

Referring to Fig. 2, in the detection arm 110 spectral separating unit separates the  
25 spectral components and the signal is forwarded to separate detectors 114. The detectors 114 may preferably consist of photodiodes (such as, but not limited to, silicon, InGaAs, extended InGaAs, and the like). Alternatively, a one or two dimensional array of detectors 114 (such as, but not limited to, photodiode array, CCD, CMOS array, active CMOS array, CMOS "smart pixel" arrays, combinations  
30 thereof and the like) may be employed for detection. Two detectors 114 for each spectral band may be used for polarization sensitive detection following separation of the recombined light into orthogonal polarization eigenstates. Detector 114 arrays

may be  $1 \times N$  for simple intensity ranging and imaging and/or Doppler sensitive detection,  $2 \times N$  for dual balanced detection,  $2 \times N$  for intensity ranging and imaging and/or polarization sensitive and/or Doppler sensitive detection, or  $4 \times N$  for combined dual balanced and intensity ranging and/or Doppler sensitive and/or polarization sensitive detection. Alternatively, an  $M \times N$  array may be used for arbitrary  $M$  to allow  
5 detection of transverse spatial information on the sample 40.

Detector signals can be amplified by Trans Impedance Amplifiers ("TIAs") 116, band pass filters 124 (digitally or using analog circuitry) and digitized by A/D converters and stored in a computer 122 for further processing. Each detector 114 is preferably  
10 configured to be shot noise limited. Shot noise limited detection is preferably achieved by adjusting the intensity of light returned from the reference arm 108 so that the shot noise dominates over the thermal noise of the resistor in the TIA 116 and is higher than the relative intensity noise ("RIN"). Each detector 114 is balanced for such dual noise reduction.

15 In one embodiment of the present invention, the number of detectors 114,  $N$  can be in the range of 2-10,000 or more. A preferred range of  $N$  is about 8-10,000 detectors. In one preferred embodiment, eight detectors 114 (or a number in that area) can provide real time, or close to real time, imaging.

Alternatively, another way for detection includes an integrating one-dimensional or  
20 two-dimensional detector 114 array which is capable of obtaining images at a rate preferably greater than  $1/f$  noise ( $f$  = frequency) (see Fig. 5). Optionally, the BPF can be implemented discretely following digitization. An additional modification includes using an optional second detector 115 array for balanced detection which allows increased reference arm power and acquisition speed due to reduction of RIN and  $1/f$   
25 noise. In a preferred embodiment, a phase tracking apparatus and/or algorithm is used in the reference arm 108 to reduce signal attenuation due to fringe instability.

This system could be implemented using a single detector 114 with dual-balanced detection enabled by either interleaving dual balanced rows of the array detector or by placing two similar array detectors adjacent to one another. If two array detectors 114  
30 and 115 are used, the values are subtracted from one another to achieve dual balance detection. If more than two array detectors are used the signals can be selectively

subtracted and complex spectral density can be obtained.

The spectral intensity as a function of wavelength is preferably constant. However, if it is not, the spectrum can be shaped in the reference, sample and/or source arms to make it constant. Spectral shapers are known in the art.

## 5 Processing

10 The signal of each detector 114 is band pass filtered around the signal frequency, such as by FFT's. The signal of all detectors 114 can be combined as explained hereinabove to obtain the complex cross spectral density in the frequency domain. By Fourier transform, the complex cross spectral density can be converted to a depth profile in the tissue. Several methods to process the complex spectral density to obtain depth profile information are known to those skilled in the art, such as, but not limited to, by obtaining at least two signals with a  $\pi/2$  phase shift in the reference arm and then reconstructing the complex spectral density by some linear combination of the two signals.

15 Following detection analog processing includes a trans impedance amplifier, band pass filter, and digitization of the signal. This signal may then be converted to reflectivity as a function of depth by the Fourier transform operation. Digital processing includes digitization, digital band pass filtering in either the frequency domain or time domain (FIR or IIR filter) and inverse Fourier transformation to  
20 recover the tissue reflectivity as a function of depth.

## System Integration

Processing of the multiple signals may be performed using an imaging or diagnostic console which performs basic operations including, mathematical image  
25 reconstruction, display, data storage. Alternatively, another embodiment, shown in Fig. 6, shows a standalone detection and processing system 300 that may be connected to OCT and/or LCI systems already in use. In this case, the detector 302 and digitization may be performed in the standalone unit. The input to the standalone unit would be the light combined from both reference and sample arms, as previously  
30 described. The output of the system would be an interferometric signal similar to

previous OCT or LCI console inputs, but with increased SNR. The standalone unit would contain a splitter 304 for splitting the wavelengths into spectral bands, multiple detectors 302, analog electronics, including TIA's 306 and an arrangement for reconstructing the interferometric signal, as previously described. The arrangement for reconstructing the interferometric signal would include either analog or digital arrangement where the analog arrangement includes band pass filters ("BPF's") 308, and analog arrangement for adding the individual interferograms from each wavelength band. The digital arrangement would include an analog to digital converter, and a CPU 310 capable of recombining the interferograms from each spectral band into a single full bandwidth interferometric signal. The reconstructed interferogram may be then the output of the standalone system or alternatively, the reconstructed interferograms demodulated signal may be used as the input to the pre-existing system console.

#### Scan Range of the Reference arm.

The ranging depth in the sample 130 is determined by the resolution with which the cross spectral density can be determined. In a method using a single detector the spectral resolution of the complex spectral density is determined by the scan range of the reference arm. The larger the scan range, the higher the spectral resolution and the larger the ranging depth in the sample. In a system with a spectral separating unit and multiple detectors, the resolution of the cross spectral density is a combination of reference arm scan range and spectral separating characteristics.

Any suitable wavelength band shape may be used for separating. For arbitrary spectral band shapes, the scan range of the reference arm 18 is determined by the delay that is needed to completely resolve the spectral components in each band.

For instance, in one preferred embodiment, as depicted in Fig. 7, a spectral separating unit can split the spectrum into two bands where each band consists of a set of narrow spectra in a comb-like structure. Fig. 7A shows the spectral band at detector #1. Fig. 7B shows the spectral band at detector #2. Fig. 7C shows the combined spectral band of both detectors. Interleaving the comb-like spectral bands of each detector 24 gives back a continuous spectrum. The resolution needed to resolve the spectrum at an individual detector is half of what it would need to be in a single detector system, and thus the scan range of the reference arm can be reduced by a factor of two, while

maintaining the same ranging depth in the sample 130. In an alternative embodiment, the spectral separating unit can be in the reference arm. In Fig. 8 an example is shown for splitting up the spectrum in several spectral bands. In this example the scan range of the reference arm can be reduced by a factor relating to the number of spectral bands while maintaining the same ranging depth in the sample.

#### Embodiments of the wavelength separating filter

Several techniques are known to separate or disperse the spectrum. One method uses a grating and a micro lens array to focus spectral components onto individual detectors. A second method uses prisms instead of a grating. A third method uses a grating and an addressable mirror array (such as, but not limited to, a "MEMS" mirror or digital light processing ("DLP") apparatus or the like) to direct spectral components to individual detectors. A fourth method uses a linear array of optical filters prior to the array of individual detectors. A fifth method uses waveguides etched into a material or manufactured from fiber optic components to generate a pattern with the desired filter action. As an example, in Fig. 8 an exemplary embodiment of a wave guide filter is provided that splits the spectrum into bands. A sixth method would use arrayed waveguide gratings ("AWG") to create the interleaved or arbitrary spectral bands.

#### Relative intensity noise

One of the noise terms that is present at the detectors is relative intensity noise ("RIN") or Bose-Einstein noise. RIN noise likely becomes dominant over shot noise for spectral widths less than a few nanometers. For many detector configurations, the spectral width at each detector may likely be smaller than a few nanometers, and the relative intensity noise can dominate the overall system noise. Thus, balanced detection, can preferably be implemented to eliminate the RIN. Several methods known in the art exist to implement balanced detection. One such method will be discussed below in further detail. For example, but not by way of limitation, as shown in Fig. 9, light from the reference arm 400 and sample arm 402 is incident on a grating 404 at slightly different angles and reflected and focused onto a linear  $N \times M$  photo detector array 406. Along the  $N$  direction (column) of the array, wavelength is encoded. Along the  $M$  direction (row) of the array, the interference pattern of the sample and reference arm at a particular wavelength is recorded. Since sample and reference arm light were incident at slightly different angles, a pattern of interference

maxima and minima will be present in the column direction. Balanced detection can be implemented by subtracting diode signals that are exactly out of phase with respect to the maxima and minima pattern. Alternatively, balanced detection can be implemented by measuring the amplitude of the interference pattern in the column  
5 direction which may be accomplished by subtracting the maxima or the interference pattern from the minima of the interference pattern along the column. An alternative embodiment for balanced detection is combining the reference and sample arm light 400, 402 to produce two outputs that have interference signals with a  $\pi$  phase shift between them. This may be accomplished by taking both output ports of a beam  
10 splitter or other beam-recombining element. The two signals may then be detected separately and subtracted. Since the signals that contain the interference terms are shifted by  $\pi$  in phase, these terms add constructively upon the operation of subtraction. The portion of signal that contains RIN, however, cancels upon subtraction. The subtraction operation can occur for all M elements and be conducted  
15 in the analog or digital domain. If subtraction is performed in the analog domain, the bandwidth of the signal is reduced by a factor of 2, preferably decreasing specified parameters of the digitization and data transfer across the computer bus.

An example of such balanced detection is shown in Fig 10, which is described more fully hereinbelow. The balance detection outputs are subtracted to generate a balanced  
20 signal that cancels RIN.

Signal processing to reconstruct the signal after spectral separating and detection.

Two cases will be discussed below as nonlimiting illustrations of exemplary embodiments of the present invention, firstly the case of continuous spectral bands (blocks), and secondly the comb-like spectral bands as depicted in Fig. 7

25 Case A: Continuous spectral bands.

The detection arm light is split into N spectral blocks, where each spectral block contains the intensity between two optical frequencies,

$$B_N = \int_{\omega_N}^{\omega_{N+1}} S_{ref}(\omega c / 2v) d\omega \quad (20)$$

The signal for the full spectral width is obtained by an FFT of the signal in each band,

an optional compensation of dispersion and other corrections to the phase and amplitude of each Fourier component to optimize the signal and to correct the spectral density for side lobe reduction, addition of the complex FFT spectra, and inverse FFT on the added complex FFT spectrum, optionally with data reduction before the inverse  
 5 FFT, to obtain the optionally demodulated function  $R(t)$ , which is the interferometric response for a depth scan with the full source spectrum.

Case B1: Comb like spectral bands and the reconstruction of the full depth range in the sample arm from reduced reference arm scans.

The following description provided below describes the principle of reconstruction of  
 10 the full depth range in the sample arm from reduced reference arm scans according to the present invention. The procedure shall be explained in the case of separating the spectrum in two spectral bands. The exemplary method can be expanded for separating into many spectral bands.

The signal at the detector for a single detector system is defined by  $R(t)$ . The depth  
 15 range in the sample is given by the measurement time  $T$  of a single A-line (depth profile) times the group velocity generated by the reference arm delay line,  

$$z_{range} = v_g T$$

The smallest resolvable frequency after an FFT is given by  $1/T$ , which gives a  
 smallest resolvable angular frequency  $\Delta\omega = 2\pi/T$ . The filter as depicted in Fig. 8  
 20 splits the signal into two bands with peaks at  $\omega = \omega_0, \omega_0 + 2\Delta\omega, \omega_0 + 4\Delta\omega, etc.$  and  
 $\omega = \omega_0 + \Delta\omega, \omega_0 + 3\Delta\omega, etc.$ , respectively.

$B_1(t)$  and  $B_2(t)$  are the signals in band one and two respectively. The signal in  
 spectral bands one and two after Fourier transform are given by  
 $B_1(\omega) = R(\omega) \cos^2(\omega T/4)$  and  $B_2(\omega) = R(\omega) \sin^2(\omega T/4)$ .

25 This product in the Fourier domain can also be written as a convolution in the time domain. Assuming the signals periodic with time  $T$ , the signals  $B_1(t)$  and  $B_2(t)$  are given by  $B_1(t) = R(t) + R(t + T/2)$  and  $B_2(t) = R(t) - R(t + T/2)$ .

Using the above equations, the signal  $R(t)$  from  $t=0$  to  $t=T$  can be reconstructed from

the signals  $B_1(t)$  and  $B_2(t)$  recorded from  $t = 0$  to  $t=T/2$  by writing,

$R(t) = B_1(t) + B_2(t)$  and  $R(t + T/2) = B_1(t) - B_2(t)$  for  $0 < t < T/2$ . For higher  $N > 2$ , the identical procedure is performed such that  $R(t)$  is reconstructed from  $B_1$  to  $B_N$ .

This demonstrates that the signals  $B_1(t)$  and  $B_2(t)$  only need to be recorded over half  
5 the depth range  $z_{range}$ . Thus, the depth ranging in the reference arm can be reduced by  
a factor of 2, while the ranging depth in the sample remains the same. If the signal is  
split into more spectral bands, like shown in Fig. 7, a similar procedure as described  
above allows reduction of the depth scan in the reference arm by a factor of  $N$ , while  
the ranging depth in the sample remains the same, and  $N$  the number of spectral  
10 bands.

An exemplary flow diagram of the procedure described above is shown in Fig. 11.

Case B2. Limit of large number of spectral bands

In the limit of a large number of spectral bands,  $N \geq \frac{L}{\lambda}$ , the optical path length change  
in the reference arm approaches that of a wavelength,  $\lambda$ . In this limit, only a phase  
15 change across one wavelength is needed for reconstructing the entire axial scan over  
length  $L$ . In this case, the reference arm path delay may be accomplished by using any  
of the aforementioned ways for scanning the reference arm delay. Other preferred  
methods according to the present invention include insertion of an electrooptic  
modulator, acoustooptic modulator or phase control rapidly scanning optical delay  
20 line ("RSOD") in the reference arm path to impart the path length delay of one  
wavelength. Also in this case, the wavelength separating unit does not separate the  
wavelengths into a comb pattern, but separates the spectrum into unique optical  
frequencies, with each frequency detected by a single detector.

Case C. Fourier domain reconstruction for arbitrary wavelength patterns

25 In contrast to the reconstruction of the LCI or OCT signal in the time or space  
domains, the signal may be reconstructed in the Fourier domain by adding the  
complex spectral components for each wavelength band to compose the Fourier  
transform of the LCI or OCT signal. Alterations of the phase for each Fourier



component may be preferred in certain selected circumstances to correct for minimization of reference arm delay length.

#### Reconstruction of the image or one dimensional axial scan

5 Following reconstruction of the LCI or OCT signal in the real domain, the axial reflectivity may be determined by demodulating the reconstructed LCI or OCT signal. An arrangement for demodulation can include multiplication by a sinusoid and low pass filtering, envelope demodulation using envelope detection, square law demodulation and low pass filtering, quadrature demodulation followed by FIR, IIR  
10 filtering, or low pass filtering. In addition, the reconstruction of Stokes vectors (polarization) and flow from these LCI or OCT signals is known to those skilled in the art. Following reconstruction and demodulation, the data may be displayed in one or two-dimensional format (image) for interpretation and ultimately diagnosis of a tissue condition or defect in a medium. If the LCI or OCT signal is reconstructed in the  
15 Fourier domain, such reconstructed signal in the Fourier domain can be demodulated in the Fourier domain by shifting the Fourier spectrum and performing an inverse Fourier transform. As a result, the complex signal in the real domain (quadrature signal) is then reconstructed into axial reflectivity information by computing the amplitude of the real portion of the quadrature signal. The complex component is used  
20 for computing polarization or flow information. Alternatively, if the signal is reconstructed in the Fourier domain, it can be directly inverse Fourier transformed into the real domain and undergo the aforementioned processing described for the reconstructed real domain signals.

Fig. 12 shows an exemplary embodiment of a Spectral Domain OCT interferometer design 500 showing spectral compounding of light sources 502, 504, and 506 and  
25 acousto-optic generation of the carrier in the reference arm. The blocks labeled AOM are acousto-optic modulators 508, 510. The two outputs each go to separate spectral detection units 114, 115 (as depicted in Figs. 3 and 13) for balanced detection.

After spectral compounding of the source light in the first 50/50 splitter and the 80/20  
30 splitter, light enters a modified Michelson interferometer. A configuration that implements balanced detection is shown. The sample arm goes to the probe (e.g., a slit

lamp). Reference arm light is transmitted through two acousto-optic modulators with a difference frequency of 10 kHz to generate a constant carrier frequency that is independent of wavelength. The balanced detection outputs go to separate spectral detection units.

## 5 Spectral detection unit

Referring to Fig. 13, the core of Spectral Domain OCT is spectral separation of the detection arm light onto a multi-element array 114. The detection arm beam 520 is spectrally separated by a grating 520 and focused by a lens 522 onto a multi-element array 114.

- 10 A scan cameras with N detector elements is used as spectral detection unit 128 (see Fig. 2). Preferably, balanced detection is implemented by adding a second line scan camera. As is known to those skilled in the art, the depth range is inversely proportional to the spectral resolution. When the real part of the complex spectral density is determined, ranging depth z is defined by,

$$15 \quad z = \frac{\lambda_0^2}{4\Delta\lambda}, \quad (18)$$

Line scan rates of 20 kHz can be achieved, allowing demodulation of a 10 kHz carrier to extract the complex cross-spectral density. Data is digitized and transferred to computer memory. Demodulation of the signal is done in software. Scan rates of 10,000 depth profiles per second or more can be achieved.

## 20 Dual Balanced detection

- Dual balanced detection is preferably used by the present invention, which is preferably utilized for the following reasons. Firstly, most light sources generate 1/f noise (f = frequency) at relatively low frequencies. Balanced detection will eliminate 1/f source noise. Secondly, an interference term of the sample arm light with itself (auto-correlation term) is present on top of the true signal term, which is the interference between sample and reference arm. This auto-correlation term can be eliminated by a differential technique. Balanced detection may eliminate this auto-correlation term from the measured signal. Thirdly, RIN can be reduced.
- 25

## Data acquisition and processing unit

The data rate at 20,000 spectral profiles per second, with 2000 detector elements and 8-10 bit resolution (the dynamic range of most line scan cameras) is 40-80 MB/sec. Maximum sustainable data transfer speed over the PCI bus is 100 MB/sec. In a computer with two independent PCI bridges to computer system memory, approximately 200MB/sec of data can be transferred for real time processing of data from two line scan cameras simultaneously. Implementation of dual balanced detection in analog by subtracting line scan camera signals before digitization may reduce the data rate by a factor of 2. High-speed data acquisition boards are available at resolutions of 12-14 bits and speeds up to 100 Msamples/sec. A single 2048 point fast Fourier transform on a 2.5 GHz Pentium 4 processor takes 50  $\mu$ sec. These numbers show that real-time processing of Spectral Domain OCT data at 20,000 spectral profiles/sec is within reach of current data acquisition and processing power of dual processor PC's. The data collected by the spectrometer can be sampled with equal wavelength increments. Fourier transform, however, links  $z$  and  $k$  space (or  $t$  and  $w$ ). Because of the non-linear relation between  $k$  and  $\lambda$  the spectrum from the spectrometer should be interpolated to create evenly spaced samples in  $k$  domain. To achieve the optimal point spread function, dispersion in the sample and reference arm of the interferometer should be balanced. We have shown that dispersion imbalance can be corrected for by digital processing, allowing for correct compensation of dispersion for individual eye lengths.

## **PHASE TRACKING**

The present invention also provides apparatus and methods for phase tracking in spectral domain ("SD") OCT.

### **25 Fully parallel SD OCT**

One of the features of fully parallel SD OCT is spectral dispersion of the detection arm light onto a multi-element array such as but not limiting to an integrating device (e.g., CCD) and measurement of the real or complex spectral density at high speeds. The detection arm beam is separated by a spectral separating unit (e.g., grating) and focused onto the array. With respect to previous Spectral Domain OCT designs known in the art, two differences are apparent that will be discussed below: 1)

implementation of balanced detection, and, 2) implementation of phase tracking.

**Spectrometer design** The depth range in SD OCT is inversely proportional to the spectral resolution. Using the complex spectral density, ranging depth  $z$  is given by,

$$z = \frac{\lambda_0^2}{2n\Delta\lambda} \quad (18)$$

- 5    **Dual balanced detection:** Dual balanced detection is advantageous for at least three reasons. First, most light sources generate  $1/f$  noise at relatively low frequencies (tens of kHz range). In time domain ("TD") OCT systems  $1/f$  noise is not a problem because the signal carrier is in general in the MHz range where  $1/f$  noise is not significant. In SD OCT, balanced detection may likely eliminate  $1/f$  source noise.
- 10   Second, an interference of the sample arm light with itself (auto-correlation term) is present on top of the true signal. This auto-correlation term can be eliminated by a differential technique. Balanced detection can be used to eliminate this auto-correlation term from the measured signal. Third, balanced detection may reduce relative intensity or Bose Einstein noise.
- 15   **Phase Tracking:** Phase tracking is preferable to eliminate phase instabilities in the interferometer. Phase instabilities can cause individual interferometric fringes to shift in location. If detection is slow relative to the shifting of the fringes, the resulting averaging results in an artifactual decrease in the measured fringe amplitude. Fast detection arrays can capture the cross spectral density at a rate of 20 to 40 kHz,
- 20   resulting in integration times of 50 to 25  $\mu\text{sec}$ , respectively. Phase instabilities arising on a time frame shorter than the integration time of the array should be compensated.

Fig. 14 shows an exemplary interference pattern as a function of path length difference between sample and reference arm.

- Phase locking circuitry is common in electronics, and is frequently used in radar and
- 25   ultrasound. Active phase tracking can be implemented by modulating the interferometer path length difference at 10 MHz with an electro-optic phase modulator in the reference arm over a fraction of the wavelength. By demodulating the intensity measured by one detector at the output of the interferometer at the frequency of the path length modulation, an error signal can be generated indicating in which direction

the phase modulator should shift to lock onto a fringe amplitude maximum. By adding an offset to the phase modulator as determined by the error signal, the phase tracker actively locks onto a fringe maximum. The phase modulator can only modulate the path length difference over a few wavelengths. The processing unit can determine if the phase modulator has reached its range limit, and jump by a full wave in phase to maintain lock on a different fringe maximum. This approach exploits the fact that phase should be controlled only modulo  $2\pi$ . In addition, the processing drives a slower component (e.g., the Rapid Scanning Optical Delay line) to extend the path length range of the phase modulator/RSOD combination over several millimeters. Phase locking can be performed on a fringe maximum, minimum, or zero crossing, based on the type of mixing performed in the demodulation circuit.

The present invention can also use autoranging technology, including processing algorithms, as disclosed in copending U.S. application No. 10/136,813, filed April 30, 2002, entitled METHOD AND APPARATUS FOR IMPROVING IMAGE CLARITY AND SENSITIVITY IN OPTICAL COHERENCE TOMOGRAPHY USING DYNAMIC FEEDBACK TO CONTROL FOCAL PROPERTIES AND COHERENCE GATING, and commonly assigned to the assignee of the present invention, the disclosure of which is incorporated herein.

The autoranging mechanism may, in one exemplary embodiment, comprise a processor unit for (a) obtaining a first scan line; (b) locating a surface location "S" of a sample; (c) locating an optimal scan range "R" of the sample; (d) modifying a reference arm delay waveform to provide an output; (e) outputting the output to a reference arm; (f) determining whether the image is complete; and (g) moving to the next scan line if the image is not complete or remapping the image using the surface S data and the waveform data stored in the memory storage device if the image is complete.

If the light returned from the sample is of low amplitude, phase locking may be unstable due to the presence of noise. In another embodiment, a separate, preferably monochromatic, light source is input into the interferometer. The separate source wavelength may overlap with the broad bandwidth OCT or LCI source spectrum or may be centered at a different wavelength than the OCT or LCI source spectrum. The separate source is preferably of higher power and may be combined with the source arm (using wavelength division multiplexer, grating, prism, filter or the like) travel to

the reference and sample arms and return back to the beam recombining element. The returned separate source light can then be separated from the OCT or LCI light following transmission back through the beam recombining element (i.e. beam splitter output). A separation arrangement can perform spectral separation by a dispersing element, such as a dichroic mirror, filter, grating, prism, wavelength division multiplexer or the like. The separate source will be detected separately from the OCT or LCI broad bandwidth light using one or more detectors. The higher power provided by this separate source can enable detection of a higher amplitude interference pattern, and provide an improved input to the phase tracker, thus enabling more stable phase tracking.

Fig. 15 shows one exemplary embodiment of a phase tracker system 600 according to the present invention with an extended phase lock range, by combining a fast element (EO phase modulator) 602 to modulate the path length difference over a small range, and a slower element (RSOD) 604 to modulate the path length over an extended range. The detector 606 signal is mixed with the phase modulator modulation frequency 608 by a mixer 610 and low pass filtered (filter not shown) to generate an error signal. The processing unit 612 preferably processes the error signal to generate an offset voltage, and adds this offset voltage to the modulation signal 608, so as to generate the output for the phase modulator driver 614. In addition, the processing unit 612 can generate a signal to the RSOD 604 to provide extended range tracking of the phase over distances of several millimeters. Light source 616, fiber splitter 618, sample arm 620 and reference arm 622 are shown, and are described herein.

**Mixer Implementation:** The intensity  $I(t)$  at the detector at a given moment within a single oscillation of the fringe pattern is given by

$$I(t) = \cos[\varphi(t)]$$

where the phase  $\varphi$  gives the position in the fringe. For  $\varphi=0$ , the signal is at a fringe maximum, for  $\varphi=\pi$ , the signal is at a fringe minimum. At an arbitrary moment  $t$ , the phase  $\varphi(t)$  is given by,

$$\varphi(t) = \alpha + \beta \sin(\omega t)$$

where  $\alpha$  describes the position within a single oscillation of the fringe pattern, and

$\beta \sin(\omega t)$  is the phase modulation introduced by the phase modulator, with  $\beta$  the amplitude of the phase modulation, and  $\omega$  the frequency of the phase modulation signal. The intensity at the photodetector  $I(t)$  can be mixed with a carrier at frequency  $\omega$  and  $2\omega$ , resulting in the mixer signal  $MixerC(t)$ ,  $MixerS(t)$ ,  $Mixer2\omega C(t)$  and  $Mixer2\omega S(t)$ ,

$$MixerC(t) = \cos(\omega t) * \cos(\alpha + \beta \sin(\omega t)), \quad MixerS(t) = \sin(\omega t) * \cos(\alpha + \beta \sin(\omega t))$$

$$Mixer2\omega C(t) = \cos(2\omega t) * \cos(\alpha + \beta \sin(\omega t)),$$

$$Mixer2\omega S(t) = \sin(2\omega t) * \cos(\alpha + \beta \sin(\omega t))$$

The time average over a single oscillation of the carrier frequency  $\omega$  of  $MixerC$ ,  $MixerS$ ,  $Mixer2\omega C$  and  $Mixer2\omega S$  is given by,

$$\overline{MixerC(t)} = 0, \quad \overline{MixerS(t)} = \sin(\alpha) * J_1(\beta), \quad \overline{Mixer2\omega C(t)} = \cos(\alpha) * J_2(\beta),$$

$$\overline{Mixer2\omega S(t)} = 0,$$

where  $J_1(\beta)$  and  $J_2(\beta)$  are a Bessel functions of the first kind; its value depends on  $\beta$ , the amplitude of the phase modulation. Thus, the signal  $\overline{MixerS(t)}$  and  $\overline{Mixer2\omega C(t)}$  are proportional to  $\sin(\alpha)$  and  $\cos(\alpha)$ , respectively, with  $\alpha$  the position within a single oscillation of the fringe pattern. The mixer outputs  $\overline{MixerS(t)}$  and  $\overline{Mixer2\omega C(t)}$  are used as an error signal to generate an offset voltage to steer the phase modulator to a new center position that minimizes the error signal, and locks the interferometer output on a fringe maximum or minimum, or a zero crossing, respectively. The complex spectral density can now be determined by two consecutive array scans, one where the error signal  $\sin(\alpha)$  is minimized, and the next where the error signal  $\cos(\alpha)$  is minimized, resulting in a 90 degrees phase shift between the two interference patterns. Using this mixing arrangement, the complex spectral density can be obtained rapidly and without resorting to an additional mechanical arrangement for changing the phase of the reference arm light.

Fig. 10 shows one exemplary embodiment of a SD OCT system 700 with phase tracker for providing balanced detection according to the present invention. In this embodiment, a source 702 provides light which passes through a splitter 704, which

sends part of the light to a sample probe 706 and the remainder of the light to a Rapid Scanning Optical Delay ("RSOD") line 708. Light is passed from the RSOD 708 to the phase modulator PM 710. Light from the phase modulator PM 710 is sent through a splitter 712, and then through two additional splitters 714 and 716, a portion of the output of which is sent as balanced detection outputs to spectral detection units (not shown, but as described elsewhere herein) and the remainder of the output is sent to the phase tracker assembly 720. In the phase tracker assembly 720, phase tracker detectors  $D_1$  and  $D_2$ , 722 and 724, receive the partial output of the pair of splitters 714 and 716, which in turn send signal to a mixer 726 to generate an error signal. A processing unit 728 processes the error signal, where the sum generation of offset voltage and adds this to the modulation signal 730 to generate the output for the phase modulator driver 732. Modulation signal, shown at box 730, is forwarded to the mixer 726 and the processing unit 726. In addition, the fringe amplitude could be too small for the phase tracker to lock. Alternatively, a secondary source with longer coherence length could be coupled to the system 700 to provide a larger fringe amplitude to the phase tracker.

The present invention provides a method for tracking phase in an imaging system, as shown in Figs. 15A-C the method comprising the steps of: (a) measuring a signal received from the sample arm; (b) increasing a phase of the signal; (c) measuring a first signal partition of the signal defined as  $x_1$  at at least one peak of the signal; (d) determining whether to increase or decrease the phase of the signal by an incremental amount; (e) after step (d), measuring a second signal partition of the signal following step d); and, if the signal is at its peak, remeasuring the signal and if the signal is not at its peak, repeating steps d) and e).

The method further may comprise that steps (a) – (f) are performed in parallel with other imaging processes. The adjustment of phase " $\phi$ " is defined as  $A(x_2 - x_1)$ , where "A" is a constant. Furthermore, optionally, step d) may further comprise the substeps of d1) determining whether  $A(x_2 - x_1)$  is within range of the phase modulator; and d2) changing  $\phi$  by an amount equal to  $A(x_2 - x_1)$  if  $A(x_2 - x_1)$  is within the range or changing  $\phi$  by an amount equal to  $A(x_2 - x_1) - m2\pi$  if  $A(x_2 - x_1)$  is outside of the range, where M is an integer greater than 1. The method may optionally further comprise a substep d3) remeasuring signal  $x_1$ .



## Data acquisition and processing unit

In general, the data collected by the spectrometer are sampled with equal wavelength increments. Fourier transform, however, links  $z$  and  $k$  space (or  $t$  and  $w$ ). Because of the non-linear relation between  $k$  and  $\lambda$  the acquired spectrum is interpolated to create  
5 evenly spaced samples in the  $k$  domain. Alternatively, the light could be dispersed in such a way on the detection array that the light is samples in equal intervals in  $k$  space, such that the interpolation becomes obsolete. Alternatively, the detection array spacing could be designed to sample the light evenly spread in the  $k$  domain, such that the interpolation becomes obsolete. To achieve the optimal point spread function,  
10 dispersion in the sample and reference arm of the interferometer should preferably be balanced. Dispersion imbalance can be corrected by digital processing.

The present invention provides a probe for locating atherosclerotic plaque in a blood vessel, comprising: an interferometer; a spectral separating unit which splits signal received from the interferometer into a plurality of optical frequencies; and a detector  
15 arrangement capable of detecting at least a portion of the optical frequencies received from the spectral separating unit.

The present invention further provides an apparatus for delivering a therapeutic agent, comprising: a probe disposed in the housing and comprising: an interferometer, a spectral separating unit which splits signal received from the interferometer into a  
20 plurality of optical frequencies, a detector arrangement capable of detecting at least a portion of the optical frequencies received from the spectral separating unit; and a conduit cooperating with the probe, and comprising a proximal end for receiving the therapeutic agent and a distal end for delivering the therapeutic agent at a predetermined location, the location being determined by imaging the environment in  
25 proximity to the distal end using the probe.

An exemplary embodiment of the present invention will be further described below in connection with the following example, which is set forth for purposes of illustration only.

### EXAMPLE

30 The method according to the present invention was verified in the laboratory by the

following experiment.

In the existing OCT system, the shot noise power spectrum as determined from the spectral density due to the reference arm optical power was measured. Then 2/3 of the spectrum from the reference arm was blocked, and experimentally it was verified that the shot noise power spectrum was reduced by a factor of three, thus demonstrating that the shot noise is reduced by a factor of 3 if the spectrum is split in three spectral bands (see Fig. 16). The upper curve (gray dotted line) shows the power spectrum for the OCT signal with one detector. For the lower curve (solid line), the spectrum was limited by 1/3 with a corresponding factor of 3 improvement in signal to noise ratio. This data was generated by experiment, blocking 2/3 of the spectrum in a grating-based double-passed pulse shaping rapidly scanning optical delay line.

An object with low reflectivity was inserted in the sample arm. Using the full spectral width of the source, the power spectrum of the interference between sample and reference arm light was determined in the lower half of the spectral density. Then the upper part of the source spectrum was blocked in the reference arm, and it was verified that the lower 1/3 of the power spectrum of the interference between sample and reference arm light had the same magnitude as in the previous measurement (see Fig. 17). This figure demonstrates that the signal amplitude is equal for the  $N=1$  and  $N=1/3$  cases where they overlap. The result of equal amplitude signal for  $N=1/3$  case and the 3-fold lower noise for the  $N=1/3$  case (see Fig. 6) demonstrates that splitting into  $N$  wavelength bands increases the SNR by a factor of  $N$ .

This demonstrates that when the light in the detection arm is split in two spectral bands, the spectral density of the interference between sample and reference arm light within the spectral bandwidth of a single detector is unchanged. Combined with the measurement that showed a reduction in the shot noise power spectrum, the conclusion is that a reduction of shot noise can be realized by splitting the detection arm light in separate spectral bands.

Experimental verification of the noise reduction.

To demonstrate the noise reduction in Spectral Domain OCT, an OCT system was used, including a Rapid Scanning Optical Delay line (RSOD) was used in the reference arm, enabling portions of the spectrum to be blocked. Detector signals were

digitized at 2.5 Msamples/sec, allowing digital processing of the fringe information. First, the thermal noise density of the detector was measured as a function of frequency by blocking all light onto the detector. Second, the shot noise density of the reference arm power was measured with only the reference arm power incident on the detector. Third, both the sample and reference arm light were incident on the detector. The sample was a single scattering surface mounted in a model eye and 512 depth profiles were acquired in 2 seconds. The power density  $I(f)^2$  was measured, which is proportional to the spectral density squared (see Eq. (9)). Then we blocked half of the spectrum in the reference and measured again the shot noise density of the reference arm by blocking the sample arm, and the power density  $I(f)^2$  when both sample and reference arm light were incident on the detector. Shot noise and power densities were corrected for thermal noise by subtraction. Thermal noise was at least a factor of 3 smaller than the lowest shot noise level.

Fig. 18 shows a graph of power density for the full spectrum, and with half of the spectrum blocked in the reference arm, as a function of frequency. The solid line shows the power density for the full spectrum. The shot noise level measured while the sample arm was blocked is also shown. The dashed line shows the power density with half the spectrum blocked in the sample arm. The shot noise level measured while the sample arm was blocked is also shown. Fig. 18 demonstrates that the shot noise level was reduced by a factor of 2 by blocking half the spectrum in the reference arm. At the same time, the signal at frequencies corresponding to wavelengths that were not blocked in the reference arm remained the same.

As is evident from Fig. 18, which summarizes the measured results, the shot noise density is reduced by approximately a factor of 2 by blocking half the spectrum in the reference arm. Fig. 19 shows that after subtraction of the shot noise levels from the corresponding signals, the power densities for those frequencies that corresponded to wavelengths that were not blocked in the reference arm remained the same. This demonstrates that the shot noise density is reduced by a factor of 2 when the total reference arm power is reduced by a factor of 2 by blocking half the spectrum, while the signal power density for wave lengths not blocked in the reference arm remains unchanged.

Fig. 19 shows a graph of the square root of the power densities for the full spectrum,

and for half the spectrum blocked in the reference arm as a function of frequency. The solid line shows the spectrum after subtraction of the respective shot noise. The dashed line shows the half spectrum after subtraction of the respective shot noise. Fig. 13 demonstrates that after subtracting the respective shot noise contributions, the signal at frequencies corresponding to wave lengths that were not blocked in the reference arm remained the same.

The next experiment further demonstrated that by dispersing the spectrum in the detection arm over several detectors, and by selectively band pass filtering the signals of each detector, the SNR is increased. The detection arm light was dispersed over 4 detectors by a diffraction grating as shown in Fig. 13, and the detector signals were separately amplified by transimpedance amplifiers with a bandwidth of 600 kHz and simultaneously digitized.

Fig. 13 shows a schematic of an exemplary apparatus setup used to demonstrate SNR improvement by Spectral Domain OCT according to the present invention. Scanning of the reference arm 106 was performed with a Rapid Scanning Optical Delay line (RSOD) 120. Individual signals from the array detector 114 were amplified by transimpedance amplifiers, digitized by a 4-channel 2.5 MHz per channel A/D board and stored in computer memory (not shown).

First, the thermal noise density of all four detectors was measured. Second, the shot noise density of the reference arm light in each detector channel 116 was measured. Third, both the sample and reference arm light were incident on the detector 114. The sample 130 was a single scattering surface mounted in a model eye and 512 depth profiles were acquired in 2 seconds. The power density  $I(f)^2$  in each detector channel 114 was measured. Then, the signals of the four detectors 114 were summed, and the combined power density  $I(f)^2$  was determined. The results are shown in Fig. 20, which demonstrates that the shot noise is lower in each individual channel compared with the sum of all channels, but that the power densities  $I(f)^2$  in the individual channels within their respective bandwidths are approximately equal to the power density  $I(f)^2$  of the coherent sum of the four channels.

Fig. 20 shows a graph of the power densities for four separate detectors 116 of Fig. 13. The spectrum in the detection arm was dispersed over four separate detectors 116

by a diffraction grating 520. The shot noise levels for each individual detector 116 are significantly lower than for the coherent sum of the four detector channels. Bars at the top of the image indicate the signal pass band that was applied to the individual channels and the coherently summed channel to generate Fig. 21.

5 In Fig. 21, the square of the coherence envelope is shown for both the direct sum of all four detection channels and the coherent sum after digitally band pass filtering each detector channel with a bandwidth centered at the center frequency of the respective detector signal. Fig. 21 shows that the interference fringe signal  $I(t)$  of the direct sum and the band pass filtered coherent sum of the four detector signals results  
10 in virtually the same coherence envelope peak value, while the band pass filtered coherent sum of the four detector signals shows a significantly lower noise level than the direct coherent sum. Since the pass band of each individual channel was slightly larger than one third of the pass band of the full signal (pass bands are indicated in Fig. 20), an increase of SNR of a factor of 2.87 was expected. The noise level dropped  
15 by a factor of 2.8. However, band pass filtering also reduced the signals slightly, by a factor of 1.12, resulting in an effective increase in SNR of a factor of 2.5.

These experiments clearly demonstrate that spectrally dispersing the light in the detection arm can offer a significant SNR advantage.

Fig. 21 shows a plot of the coherence envelope for the coherently summed channels,  
20 and the coherently summed channels after band pass filtering each channel. The solid line is the sum of channels. The dashed line is the pass filtered sum of channels. Fig. 21 clearly demonstrates the signal to noise gain that can be achieved by spectrally dispersing the signal in the detection arm over several individual detectors. In this example the noise level was reduced by a factor of approximately 2.8. Since the  
25 coherence peak was reduced by a factor of 1.12 due to some remaining signal fraction filtered out by the band pass filters, the actual SNR improvement was 2.5.

Although only a few exemplary embodiments of this invention have been described in detail above, those skilled in the art will readily appreciate that many modifications are possible in the exemplary embodiments without materially departing from the  
30 novel teachings and advantages of this invention. Accordingly, all such modifications are intended to be included within the scope of this invention as defined in the following claims. It should further be noted that any patents, applications and

publications referred to herein are incorporated by reference in their entirety.

## CLAIMS

### WHAT IS CLAIMED IS:

1. An apparatus for optical imaging, comprising:
  - a) an interferometer;
  - 5 b) a spectral separating unit which splits signal received from said interferometer into a plurality of optical frequencies; and,
  - c) a plurality of detectors, each detector capable of detecting at least a portion of said optical frequencies received from said spectral separating unit.
- 10 2. The apparatus of Claim 1, wherein said interferometer comprises
  - d) a means for splitting energy received from a source of electromagnetic radiation into a reference signal and a sample signal;
  - e) a reference arm providing a reference arm light;
  - f) a sample arm providing a sample arm light; and,
  - 15 g) a means for recombining said reference arm light and said sample arm light.
3. The apparatus of Claim 1, wherein each of said plurality of detectors has at least one transimpedance amplifier associated therewith.
4. The apparatus of Claim 1, wherein each of said detectors has at least one band  
20 pass filter associated therewith.
5. The apparatus of Claim 1, further comprising at least one source of electromagnetic radiation wherein said source of said electromagnetic radiation has a temporal coherence lower than a predetermined threshold.
6. The apparatus of Claim 5, wherein said source of electromagnetic radiation  
25 has temporal coherence of less than about 30  $\mu\text{m}$ .

7. The apparatus of Claim 1, wherein each of said detectors is balanced to be shot noise limited.
8. The apparatus of Claim 1, wherein each of said detectors is balanced to reduce relative intensity noise.
- 5 9. The apparatus of Claim 1, wherein said radiation source is selected from the group consisting of a semiconductor optical amplifier, a superluminescent diodes, light-emitting diodes, solid-state femtosecond sources, amplified spontaneous emission, continuum sources, thermal sources, and combinations thereof.
- 10 10. The apparatus of Claim 2, wherein said means for splitting is a beam splitter.
11. The apparatus of Claim 2, wherein said means for splitting is a circulator.
12. The apparatus of Claim 2, wherein said means for splitting is utilized in free space using a free space splitter or circulator.
13. The apparatus of Claim 2, wherein said means for splitting is utilized using at  
15 least one passive fiber optic component.
14. The apparatus of Claim 2, wherein said splitting means and said recombining means are integrated with one another.
15. The apparatus of Claim 12, further comprising a signal processing unit which  
20 is configured to process signal received from said plurality of detectors, and reconstruct longitudinal information from within at least one arm of said interferometer.
16. The apparatus of Claim 15, further comprising an analog-digital converter.
17. The apparatus of Claim 15, wherein said processing unit further includes a digital band pass filter.
- 25 18. The apparatus of Claim 15, wherein said processing unit further includes at least one analog band pass filter.



19. The apparatus of Claim 15, wherein said processing unit further includes at least one analog transimpedance amplifier.
20. The apparatus of Claim 1, further comprising a phase modulator.
21. The apparatus of Claim 1, further comprising a demodulator.
- 5 22. The apparatus of Claim 1, wherein said reference arm has only a single reference path.
23. The apparatus of Claim 1, wherein said sample arm has only a single sample path.
24. The apparatus of Claim 1, further comprising a means for autoranging.
- 10 25. The apparatus of Claim 24, wherein said means for autoranging comprises a processor unit for
- a) obtaining a first scan line;
  - b) locating a surface location "S" of a sample;
  - c) locating an optimal scan range "R" of the sample;
  - 15 d) modifying a reference arm delay waveform to provide an output;
  - e) outputting said output to a reference arm;
  - f) determining whether said image is complete; and,
  - g) moving to the next scan line if said image is not complete or remapping said image using said surface S data and said waveform data stored in said memory storage device if said image is complete.
- 20 26. The apparatus of Claim 1, further comprising a motionless nonmechanical arrangement for introducing a reference arm delay.
27. The apparatus of Claim 26, wherein said reference arm delay arrangement comprises a means for introducing a frequency dependent phase change.

28. The apparatus of Claim 2, wherein said plurality of detectors comprises a plurality of photodiodes.
29. The apparatus of Claim 2, wherein said plurality of detectors comprises an array of detectors.
- 5 30. The apparatus of Claim 29, wherein said array of detectors is a one dimensional array.
31. The apparatus of Claim 29, wherein said array of detectors is a two dimensional array.
32. The apparatus of Claim 29, wherein said detector array is a photodiode array, CCD, CMOS array, active CMOS array, or a combination thereof.
- 10 33. The apparatus of Claim 2, wherein said spectral separating unit separates light into orthogonal polarization eigenstates.
34. The apparatus of Claim 33, wherein each of said plurality of detectors comprises two detectors.
- 15 35. The apparatus of Claim 1, wherein said spectral separating unit comprises at least one grating.
36. The apparatus of Claim 1, wherein said spectral separating unit comprises at least one prism.
37. The apparatus of Claim 1, wherein said spectral separating unit comprises at least one lens.
- 20 38. The apparatus of Claim 1, wherein said spectral separating unit comprises at least one grating and at least one addressable mirror array.
39. The apparatus of Claim 1, wherein said spectral separating unit comprises a linear array of optical filters.
- 25 40. The apparatus of Claim 1, wherein said spectral separating unit comprises at least one waveguide filter.

41. The apparatus of Claim 1, wherein said spectral separating unit comprises an array of a plurality of waveguide gratings.
42. The apparatus of Claim 1, wherein said spectral separating unit splits said signal into a plurality of bands whereby each band comprises a set of narrow spectra in a comb-like structure.
43. The apparatus of Claim 1, wherein said processing unit reconstructs the signal from said plurality of detectors in the time domain by mathematical manipulation of each plurality of signals obtained from plurality of detectors.
44. The apparatus of Claim 1, wherein said processing unit reconstructs the signal from said plurality of detectors in the Fourier domain by mathematical manipulation of each plurality of signals obtained from plurality of detectors.
45. The apparatus of Claim 1, wherein said processing unit determines longitudinal information by demodulating reconstructed signal.
46. The apparatus of Claim 1, wherein said plurality of detectors enables processing on individual channels.
47. The apparatus of Claim 46, further comprising an autoranging processor unit for
- a) obtaining a first scan line;
  - b) locating a surface location "S" of a sample;
  - c) locating an optimal scan range "R" of the sample;
  - d) modifying a reference arm delay waveform to provide an output;
  - e) outputting said output to a reference arm;
  - f) determining whether said image is complete; and,
  - g) moving to the next scan line if said image is not complete or remapping said image using said surface S data and said waveform data stored in said memory storage device if said image is complete.

48. The apparatus of Claim 1, further comprising a means for tracking the phase of interference fringes.
49. An apparatus for optical imaging, comprising:
- a) an interferometer;
  - 5 b) means for creating a reference arm delay;
  - c) a spectral separating unit which splits signal received from said interferometer into a plurality of optical frequencies which utilizes a signal received from said means for creating said reference arm delay; and,
  - 10 d) a plurality of detectors, each detector capable of detecting at least a portion of said optical frequencies received from said spectral separating unit.
50. The apparatus of Claim 49, wherein said means for creating a reference arm delay comprises a means for stretching an optical fiber.
- 15 51. The apparatus of Claim 49, wherein said means for creating a reference arm delay comprises a piezoelectric transducer configured to perform free space translational scanning.
52. The apparatus of Claim 49, wherein said means for creating a reference arm delay comprises a phase control optical delay line.
- 20 53. The apparatus of Claim 49, wherein said reference arm scans over at least a fraction of the ranging depth equal to one over the number of detectors.
54. The apparatus of Claim 49, wherein said means for creating a reference arm delay further comprises a carrier frequency generator.
55. The apparatus of Claim 49, wherein said means for creating a reference arm delay comprises an acoustooptic modulator.
- 25 56. The apparatus of Claim 49, wherein said means for creating a reference arm delay comprises an electrooptic modulator.

57. The apparatus of Claim 49, wherein said means for creating a reference arm delay comprises a phase control RSOD.
58. The apparatus of Claim 49, wherein said reference arm delay has a distance "z" being less than the range of said sample arm.
- 5 59. An apparatus for tracking the phase to reduce signal attenuation due to fringe instability, comprising:
- a) at least one phase modulator;
  - b) an interferometer;
  - c) at least one light source;
  - 10 d) at least one detector;
  - e) a signal processing device for creating a feedback loop.
60. The apparatus of Claim 59, wherein said phase modulator induces a phase delay.
61. The apparatus of Claim 59, wherein said phase modulator induces a path  
15 delay.

62. A method for tracking phase in an imaging system, said method comprising the steps of:
- a) measuring a signal received from said sample arm;
  - b) increasing a phase of said signal;
  - 5 c) measuring a first signal portion of said signal defined as  $x_1$  at at least one peak of said signal;
  - d) determining whether to increase or decrease the phase of said signal by an incremental amount;
  - 10 e) after step (d), measuring a second signal partition of said signal following step d); and,
  - f) if said signal is at its peak, remeasuring said signal and if said signal is not at its peak, repeating steps d) and e).
63. The method of Claim 62, wherein steps (a)-(f) are performed in parallel with other imaging processes.
- 15 64. The method of Claim 63, wherein said adjustment of phase " $\phi$ " is defined as  $A(x_2 - x_1)$ , where "A" is a constant.
65. The method of Claim 64, wherein step d) further comprises the substeps of d1) determining whether  $A(x_2 - x_1)$  is within range of said phase modulator; and d2) changing  $\phi$  by an amount equal to  $A(x_2 - x_1)$  if  $A(x_2 - x_1)$  is within said range or
- 20 changing  $\phi$  by an amount equal to  $A(x_2 - x_1) - M2\pi$  if  $A(x_2 - x_1)$  is outside of said range, where M is an integer greater than 1.
66. The method of Claim 65, further comprising substep d3) remeasuring signal  $x_1$ .

67. An apparatus for tracking phase which extended lock range, comprising:
- a) a phase tracking subassembly, comprising
    - i) a phase modulator driver,
    - ii) a mixer configured to mix signal from at least one detector using modulation frequency from a phase modulator, and to generate an error signal therefrom, and,
    - iii) a processing unit configured to process said error signal, and to generate an offset voltage.
68. The apparatus of Claim 67, wherein said at least one detector comprises two detector arrays.
69. An apparatus for spectral domain optical coherence tomography imaging with phase tracking, comprising:
- a) a phase tracking arrangement, comprising a plurality of detectors; a phase modulator driver, a mixer for mixing signal from said detectors using a with modulation frequency from a phase modulator, and for generating an error signal therefrom, and a processing unit configured to process said error signal, and to generate an offset voltage.

70. A method of increasing sensitivity and signal to noise ratio in OCT and LCI imaging, comprising the steps of:
- a) providing a source of electromagnetic radiation;
  - b) directing said light source through a beam splitter such that a portion of said light is directed to a reference arm delay mechanism and a portion of said light is directed to a sample;
  - c) passing said portion of said light reflected back from said sample and said portion of said light from said reference arm delay mechanism through a spectral multiplexing assembly;
  - d) splitting said light from said spectral multiplexing assembly into a plurality of unique frequency spectral band signals;
  - e) directing each of said band signals to at least one detector;
  - f) processing said light signals; and,
  - g) reconstructing longitudinal information from within at least one of said arms of the interferometer based on said processed light signals.



71. A probe useful in optical coherence tomography imaging, comprising:

- a) an interferometer;
- b) a spectral separating unit which splits signal received from said interferometer into a plurality of unique frequencies;
- 5 c) a plurality of detectors, each detector capable of detecting a respective frequency signal received from said spectral separating unit, each of said plurality of detectors having at least one transimpedance amplifier associated therewith and each of said plurality of detectors having at least one band pass filter associated therewith;
- 10 d) a processing arrangement for processing signal received from said plurality of detectors; and
- e) a display arrangement for displaying said processed signal.

72. A device for optical coherence tomography imaging, comprising:

- a) a flexible catheter body having at least one bore therethrough and  
15 having proximal and distal ends; and,
- b) an optical probe extending through said catheter body such that said optical probe is maintained a distance away from the surface of said tissue when disposed within a patient, said optical probe adapted at its proximal end for connection to an electro-optic image analysis system,  
20 said optical probe comprising
  - i) at least one optical fiber,
  - ii) a lens element, and
  - iii) a prism capable of transmitting light from said optical fiber to said tissue surface and receiving reflected light from said tissue  
25 surface.

73. The method of Claim 72, further comprising a cable associated with said prism for mechanically rotating said prism about a transverse axis thereof.

74. An apparatus for performing optical coherence tomography imaging, comprising:
- a) an interferometer;
  - b) a plurality of detectors, each detector having at least one transimpedance amplifier associated therewith and at least one band pass filter associated therewith;
  - c) a processing arrangement for processing signal received from said plurality of detectors; and
  - d) a display arrangement for displaying said processed signal.
75. The apparatus of 1, wherein said sample is scanned in a series of simultaneous illuminations of substantially all of the area of said sample.
76. An apparatus for optically imaging at least one portion of the sample, comprising:
- a. a spectral separating arrangement configured to receive at least one electro-magnetic signal from an interferometer, and to separate the at least one electro-magnetic signal into a plurality of spectral bands, the at least one electromagnetic signal being associated with characteristics of the at least one portion of the sample; and
  - b. a detecting arrangement configured to detect at least one of the spectral bands received from the spectral separating arrangement, and configured to generate a resultant signal for use to image at least one portion of the at least one portion of the sample.
77. The apparatus according to Claim 76, wherein the detecting arrangement includes a plurality of detectors, each of the detectors configured to receive a respective one of the spectral bands.

78. The apparatus according to Claim 77, wherein the detectors digitize the detected spectral bands into digitized signals, and further comprising:
- a. a plurality of filters configured to receive the digitized signals, and to band-pass filter the digitized signals.
- 5 79. The apparatus according to Claim 78, wherein the at least one electromagnetic signal includes information regarding at least one portion of an interior of the at least one portion of the sample, and further comprising:
- a. a processing arrangement configured to receive the digitized signals, and generate data associated with the at least one portion of the interior  
10 of the at least one portion of the sample.
80. The apparatus according to Claim 76, wherein the detecting arrangement generating further signals based on the detected spectral bands, and further comprising a processing arrangement configured to receive the further signals, and generate data associated with longitudinal information extending along the  
15 at least one portion of the sample.
81. The apparatus according to Claim 76, wherein the interferometer receives the electro-magnetic signals are generated by an electro-magnetic source.

82. A logic arrangement to provide data associated with optical imaging of at least one portion of a sample, which, when executed by a processing arrangement, configures the processing arrangement to execute the steps comprising of:
- 5 a. receiving signals that correspond to spectral bands of the at least one electro-magnetic signal from a detecting arrangement, the detecting arrangement detecting the spectral bands that are separated from the at least one electro-magnetic signal by a spectral separating arrangement, the spectral separating arrangement receiving the at least one electro-magnetic signal from an interferometer, the at least one
- 10 electromagnetic signal being associated with characteristics of the at least one portion of the sample; and
- b. generating the data based on information corresponding to the received signals.
83. A method for providing data associated with optical imaging of at least one
- 15 portion of a sample, comprising the steps of:
- a. receiving signals that correspond to spectral bands of the at least one electro-magnetic signal from a detecting arrangement, the detecting arrangement detecting the spectral bands that are separated from the at least one electro-magnetic signal by a spectral separating arrangement, the spectral separating arrangement receiving the at least one electro-magnetic signal from an interferometer, the at least one
- 20 electromagnetic signal being associated with characteristics of the at least one portion of the sample; and
- b. generating the data based on information corresponding to the received
- 25 signals.

84. A storage medium including executable instructions thereon to provide data associated with optical imaging of at least one portion of a sample, wherein, when the executable instructions are executed by a processing system, the executable instructions configure the processing system to perform the steps comprising of:
- 5
- a. receiving signals that correspond to spectral bands of the at least one electro-magnetic signal from a detecting arrangement, the detecting arrangement detecting the spectral bands that are separated from the at least one electro-magnetic signal by a spectral separating arrangement, the spectral separating arrangement receiving the at least one electro-magnetic signal from an interferometer, the at least one electromagnetic signal being associated with characteristics of the at least one portion of the sample; and
  - 10
  - b. generating the data based on information corresponding to the received signals.
  - 15
85. An apparatus for tracking a phase of at least one electro-magnetic signal so as to reduce an attenuation of the at least one signal due to its fringe instability, comprising:
- a. a processing arrangement configured to:
  - 20
  - b. receiving information associated with the at least one signal;
  - c. adjusting the phase of the at least one signal;
  - d. obtaining position of a signal section of the at least one signal;
  - e. modifying at least one characteristic of the at least one signal if the position of the signal section is provided away from a peak of the at least one signal by more than a predetermined distance; and
  - 25
  - f. repeating steps (d) and (e) until the at least one signal is within the predetermined distance from the peak.

86. The apparatus according to Claim 85, wherein the information corresponds to a combination of at least one of the spectral bands which are separated from the at least one electro-magnetic signal by a spectral separating arrangement.
87. A logic arrangement for tracking a phase of at least one electro-magnetic signal so as to reduce an attenuation of the at least one signal due to its fringe instability, which, when executed by a processing arrangement, configures the processing arrangement to execute the steps comprising of:
- a. receiving information associated with the at least one signal;
  - b. adjusting the phase of the at least one signal;
  - c. obtaining a position of a signal section of the at least one signal;
  - d. modifying at least one characteristic of the at least one signal if the position of the signal section is away from a peak of the at least one signal by more than a predetermined distance; and
  - e. repeating steps (d) and (e) until the at least one signal is within the predetermined distance from the peak.
88. A method for tracking a phase of at least one electro-magnetic signal so as to reduce an attenuation of the at least one signal due to its fringe instability, comprising the steps of:
- a. receiving information associated with the at least one signal;
  - b. adjusting the phase of the at least one signal;
  - c. obtaining a position of a signal section of the at least one signal;
  - d. modifying at least one characteristic of the at least one signal if the position of the signal section is away from a peak of the at least one signal by more than a predetermined distance; and
  - e. repeating steps (d) and (e) until the at least one signal reaches a further position that is within the predetermined distance from the peak.

89. A storage medium including executable instructions thereon for tracking a phase of at least one electro-magnetic signal so as to reduce an attenuation of the at least one signal due to its fringe instability, wherein, when the executable instructions are executed by a processing system, the executable instructions configure the processing system to perform the steps comprising of:
- 5
- a. receiving information associated with the at least one signal;
  - b. adjusting the phase of the at least one signal;
  - c. obtaining a position of a signal section of the at least one signal;
  - 10 d. modifying at least one characteristic of the at least one signal if the position of the signal section is away from a peak of the at least one signal by a predetermined distance; and
  - e. repeating steps (d) and (e) until the at least one signal is within the predetermined distance from the peak.
- 15 90. An apparatus for tracking a phase of at least one electro-magnetic signal associated with at least one portion of a sample, comprising:
- a. a detecting arrangement obtaining at least one first signal comprising a plurality of spectral bands separated from the at least one electro-magnetic signal;
  - 20 b. a phase modulator driver having a modulating frequency, and configured to modulate the at least one first signal based on the modulating frequency so as to generate at least one second signal;
  - c. a mixer configured to mix the at least one first signal with the at least one second signal so as to generate a resultant signal, and
  - 25 d. a processing arrangement configured to generate an offset voltage based on the resultant signal.

91. A logic arrangement for tracking a phase of at least one electro-magnetic signal associated with at least one portion of a sample, which, when executed by a processing arrangement, configures the processing arrangement to execute the steps comprising of:
- 5           a.     obtaining at least one first signal comprising a plurality of spectral bands separated from the at least one electro-magnetic signal;
- b.     modulating the at least one first signal based on a modulating frequency of a modulating arrangement so as to generate at least one second signal;
- 10          c.     mixing the at least one first signal with the at least one second signal so as to generate a resultant signal, and
- d.     generating an offset voltage based on the resultant signal.
92. A method for tracking a phase of at least one electro-magnetic signal associated with at least one portion of a sample, comprising the steps of:
- 15          a.     obtaining at least one first signal comprising a plurality of spectral bands separated from the at least one electro-magnetic signal;
- b.     modulating the at least one first signal based on a modulating frequency of a modulating arrangement so as to generate at least one second signal;
- 20          c.     mixing the at least one first signal with the at least one second signal so as to generate a resultant signal, and
- d.     generating an offset voltage based on the resultant signal.



- 5 93. A storage medium including executable instructions thereon for tracking a phase of at least one electro-magnetic signal so as to reduce an attenuation of the at least one signal due to its fringe instability, wherein, when the executable instructions are executed by a processing system, the executable instructions configure the processing system to perform the steps comprising of:
- a. obtaining at least one first signal comprising a plurality of spectral bands separated from the at least one electro-magnetic signal;
  - 10 b. modulating the at least one first signal based on a modulating frequency of a modulating arrangement so as to generate at least one second signal;
  - c. mixing the at least one first signal with the at least one second signal so as to generate a resultant signal, and
  - d. generating an offset voltage based on the resultant signal.
- 15 94. An apparatus for providing data associated with at least one portion of the sample, comprising:
- a. a spectral separating arrangement configured to receive at least one electro-magnetic signal from an interferometer, and to separate the at least one electro-magnetic signal into a plurality of spectral bands, the  
20 at least one electromagnetic signal being associated with characteristics of the at least one portion of the sample; and
  - b. a detecting arrangement configured to detect at least one of the spectral bands received from the spectral separating arrangement, and configured to generate a resultant signal for use with the data.

95. A logic arrangement to provide data associated at least one portion of a sample, which, when executed by a processing arrangement, configures the processing arrangement to execute the steps comprising of:
- a. receiving signals that correspond to spectral bands of the at least one electro-magnetic signal from a detecting arrangement, the detecting arrangement detecting the spectral bands that are separated from the at least one electro-magnetic signal by a spectral separating arrangement, the spectral separating arrangement receiving the at least one electro-magnetic signal from an interferometer, the at least one electromagnetic signal being associated with characteristics of the at least one portion of the sample; and
  - b. generating the data based on information corresponding to the received signals.
96. A method for providing data associated with at least one portion of a sample, comprising the steps of:
- a. receiving signals that correspond to spectral bands of the at least one electro-magnetic signal from a detecting arrangement, the detecting arrangement detecting the spectral bands that are separated from the at least one electro-magnetic signal by a spectral separating arrangement, the spectral separating arrangement receiving the at least one electro-magnetic signal from an interferometer, the at least one electromagnetic signal being associated with characteristics of the at least one portion of the sample; and
  - b. generating the data based on information corresponding to the received signals.

- 5 97. A storage medium including executable instructions thereon to provide data associated with optical imaging of at least one portion of a sample, wherein, when the executable instructions are executed by a processing system, the executable instructions configure the processing system to perform the steps comprising of:
- 10 a. receiving signals that correspond to spectral bands of the at least one electro-magnetic signal from a detecting arrangement, the detecting arrangement detecting the spectral bands that are separated from the at least one electro-magnetic signal by a spectral separating arrangement, the spectral separating arrangement receiving the at least one electro-magnetic signal from an interferometer, the at least one electromagnetic signal being associated with characteristics of the at least one portion of the sample; and
- 15 b. generating the data based on information corresponding to the received signals.
98. An apparatus for tracking a phase of at least one electromagnetic signal so as to reduce an attenuation of the at least one signal due to its fringe instability, comprising:
- 20 a. a processing arrangement configured to:
- b. receiving information associated with the at least one signal;
- c. adjusting the phase of the at least one signal;
- d. obtaining position of a signal section of the at least one signal;
- 25 e. modifying least one characteristic of the at least one signal if the position of the signal section is away from a peak of the at least one signal by a predetermined distance; and
- f. repeating steps (d) and (e) until the at least one signal is within the predetermined distance from the peak.

99. An apparatus for performing optical coherence tomography imaging, comprising:
- a. an interferometer providing at least one first signal;
  - b. at least one detector receiving the at least one first signal, the at least detector having at least one transimpedance amplifier associated therewith and at least one band pass filter associated therewith so as to generate at least one second signal;
  - c. a first arrangement configured to process the at least one second signal; and
  - d. a second arrangement configured to display the at least one second processed signal.
100. The apparatus of Claim 99, wherein said interferometer comprises an arrangement configured to split the at least one first source into a reference signal and a sample signal.
101. A probe for locating atherosclerotic plaque in a blood vessel, comprising:
- a. an interferometer;
  - b. a spectral separating unit which splits signal received from said interferometer into a plurality of optical frequencies; and
  - c. a detector arrangement capable of detecting at least a portion of said optical frequencies received from said spectral separating unit.

102. An apparatus for delivering a therapeutic agent, comprising:

a. a probe disposed in said housing and comprising:


i) an interferometer,

ii) a spectral separating unit which splits signal received from said  
interferometer into a plurality of optical frequencies,

iii) a detector arrangement capable of detecting at least a portion of  
said optical frequencies received from said spectral separating  
unit; and

b. a conduit cooperating with said probe, and comprising a proximal end  
for receiving said therapeutic agent and a distal end for delivering said  
therapeutic agent at a predetermined location, said location being  
determined by imaging the environment in proximity to said distal end  
using said probe.

FIG. 1

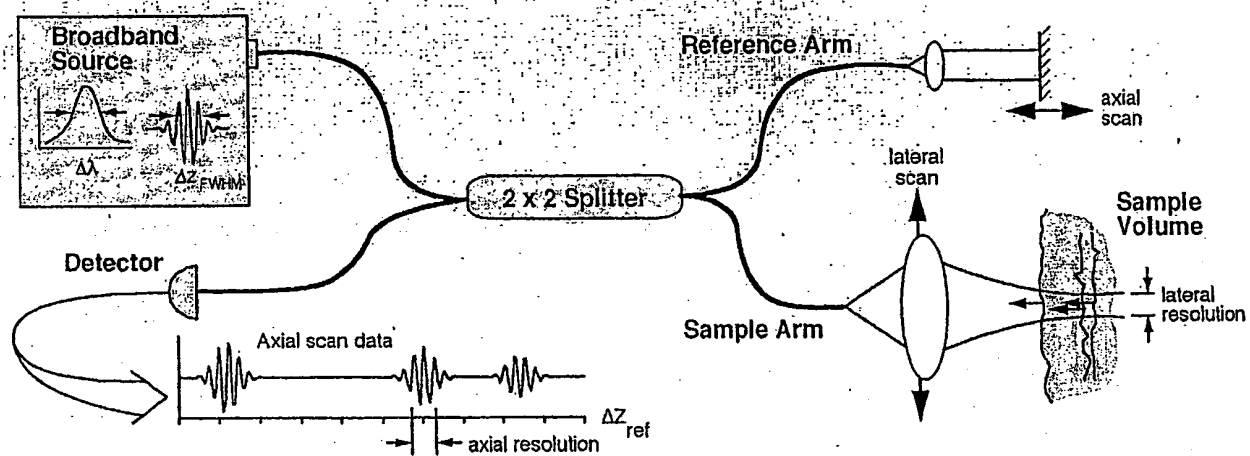

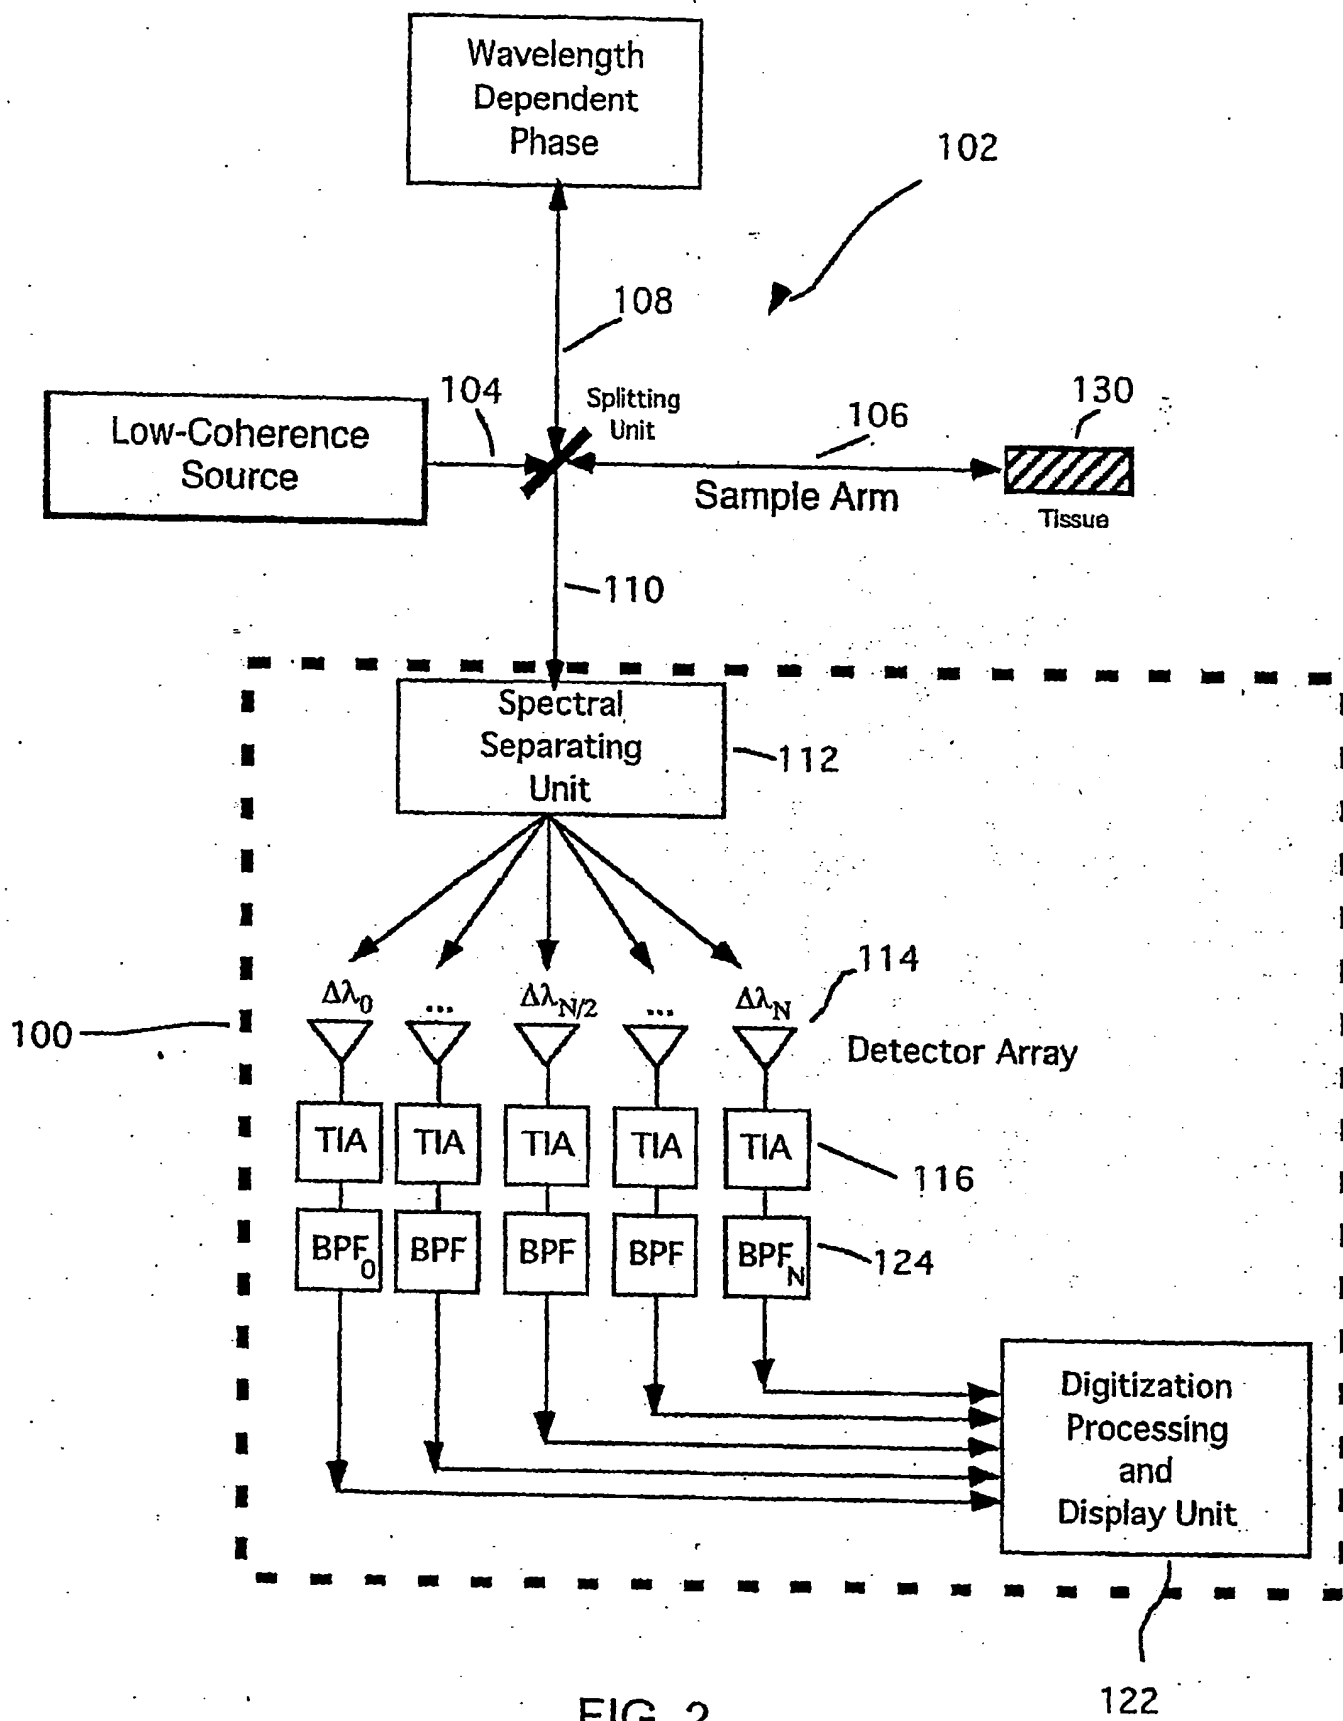


FIG. 2

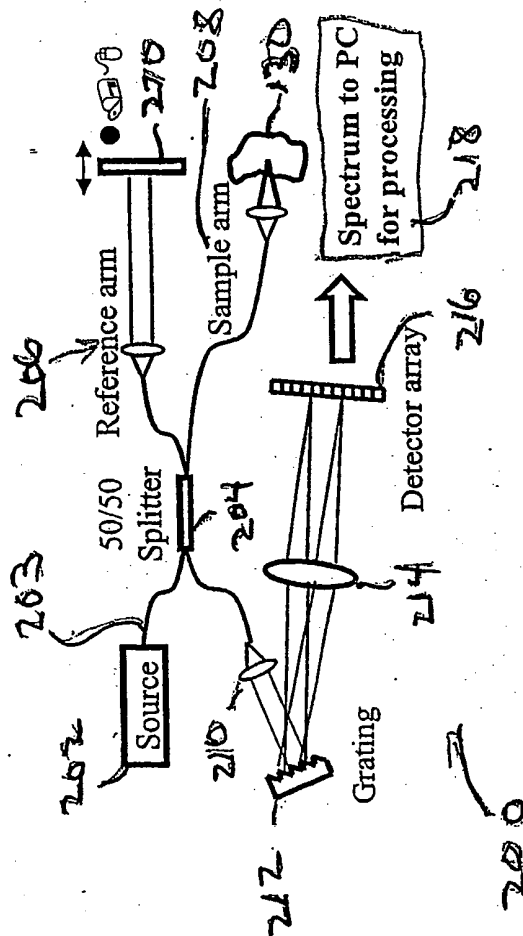
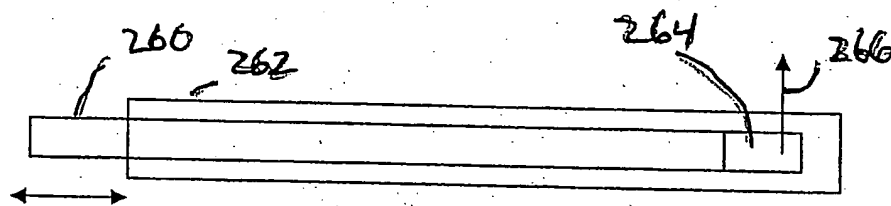


FIG. 3



FIG. 4



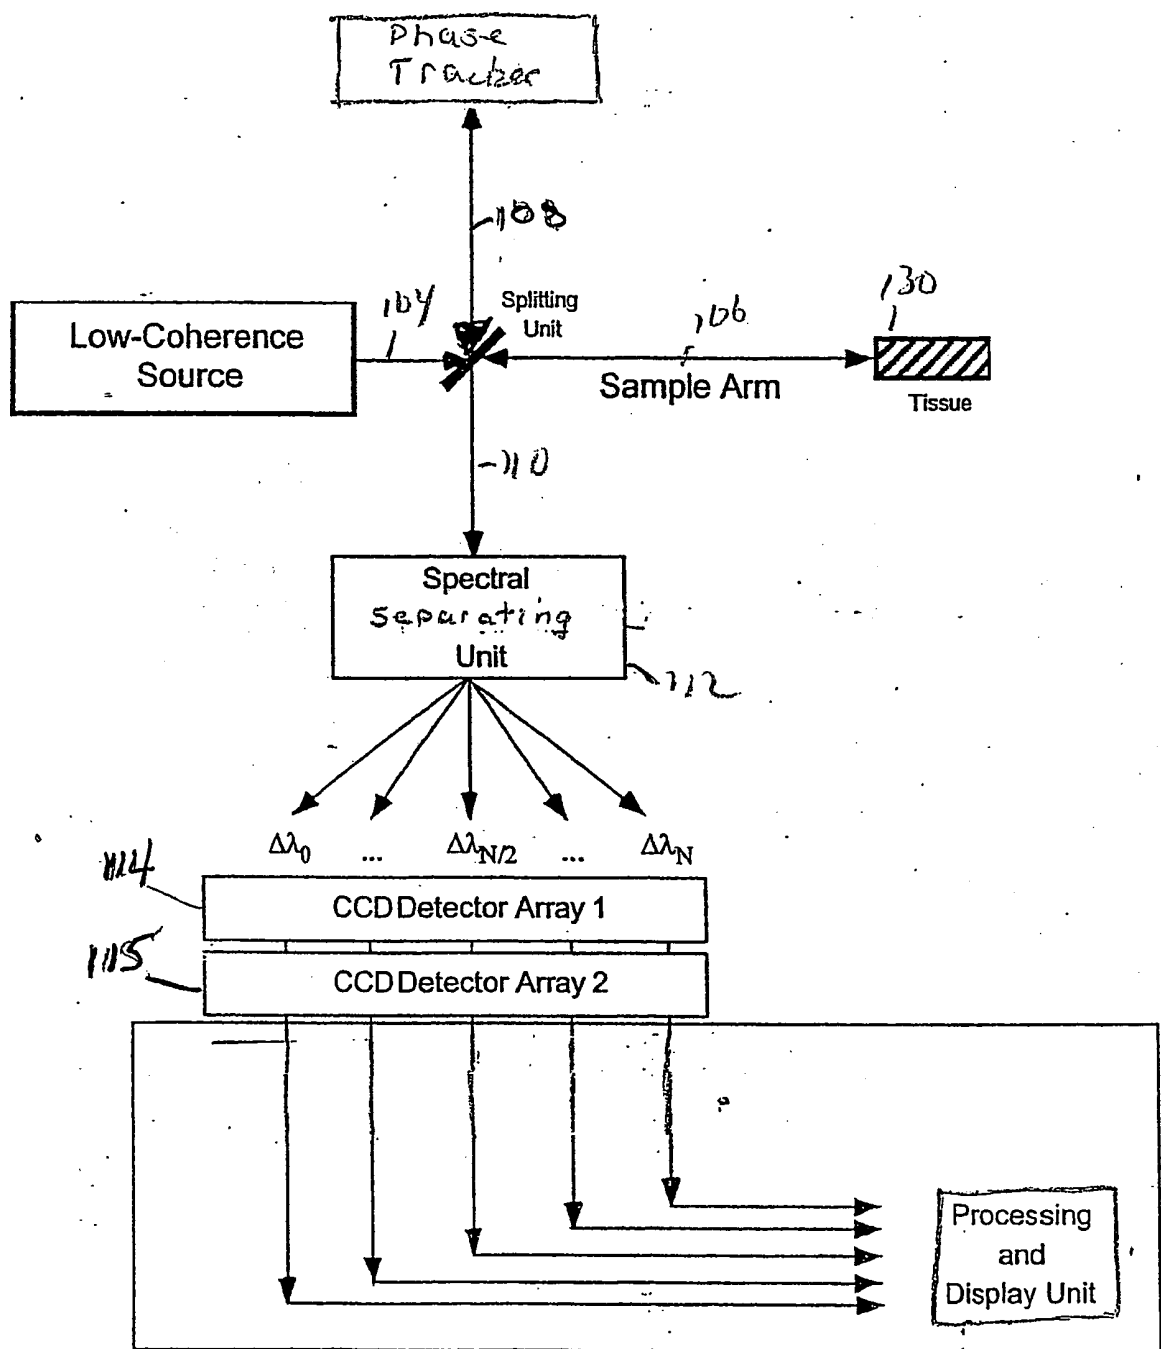


FIG. 5



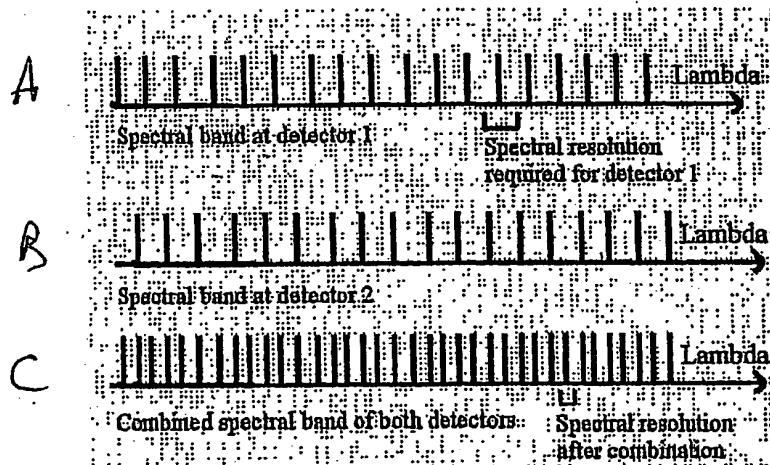


FIG. 7

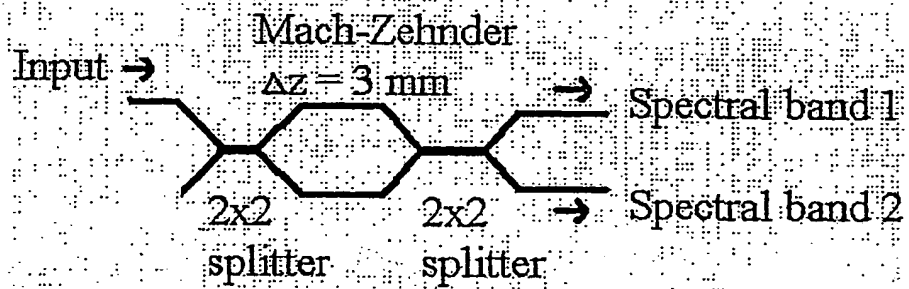


FIG. 8

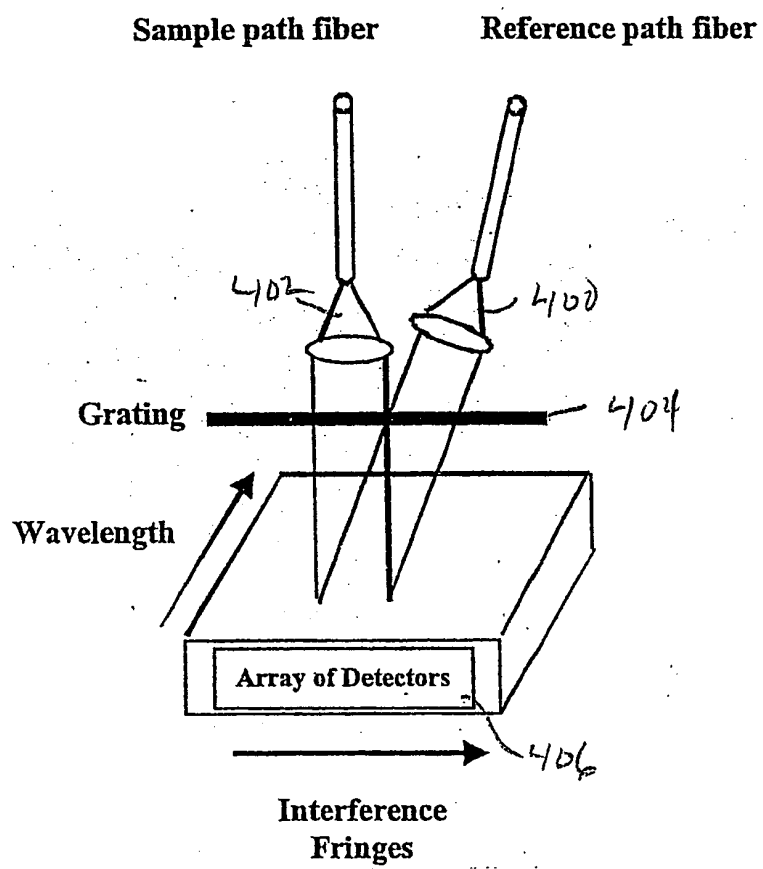


FIG. 9

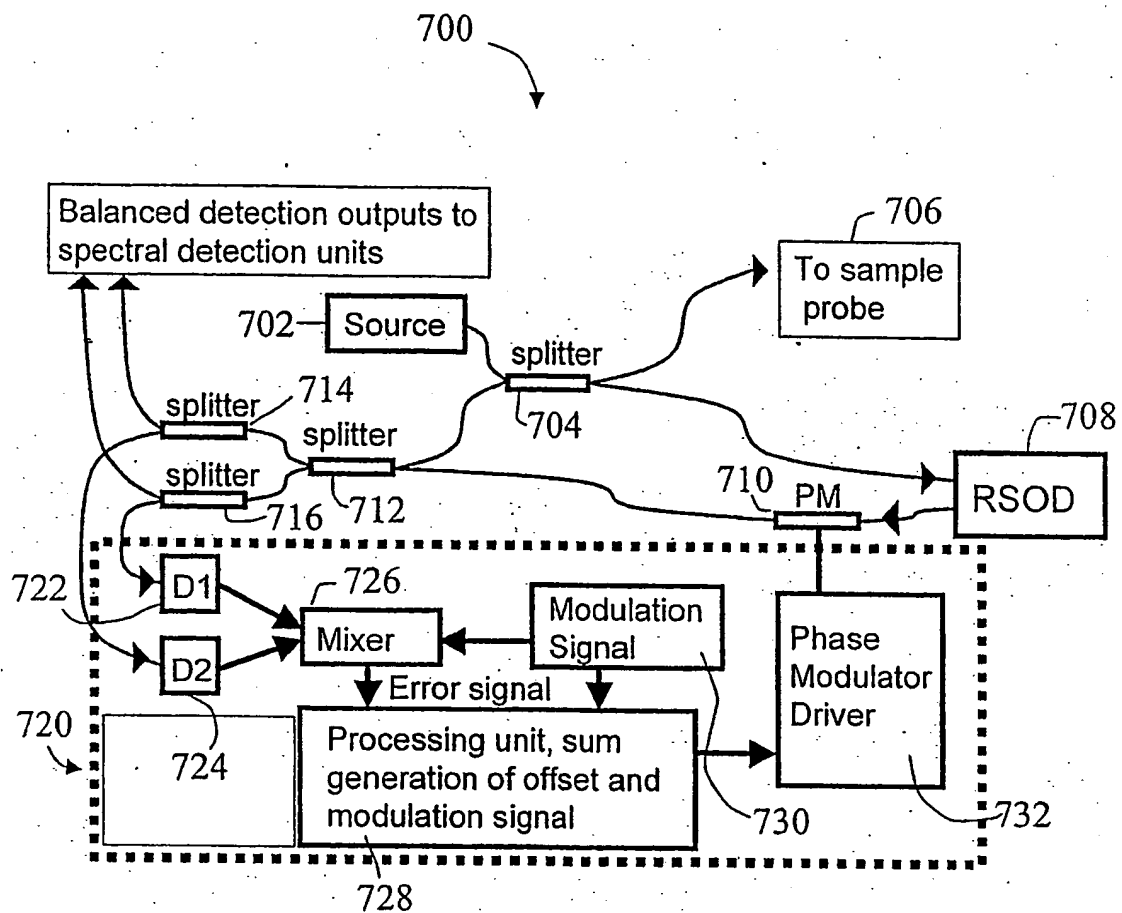


FIG. 10

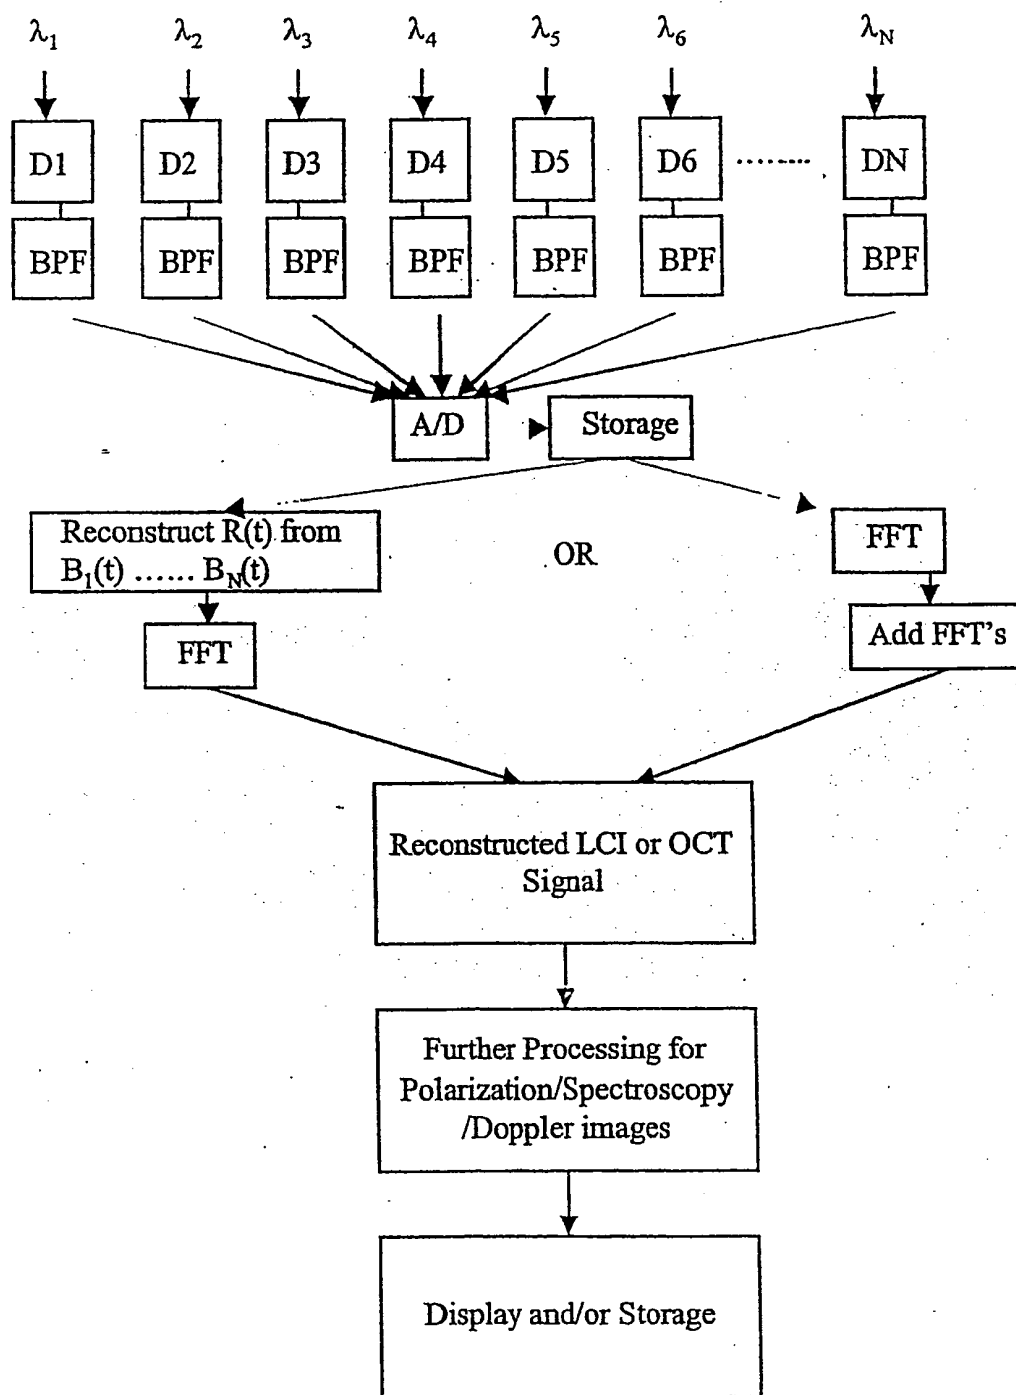
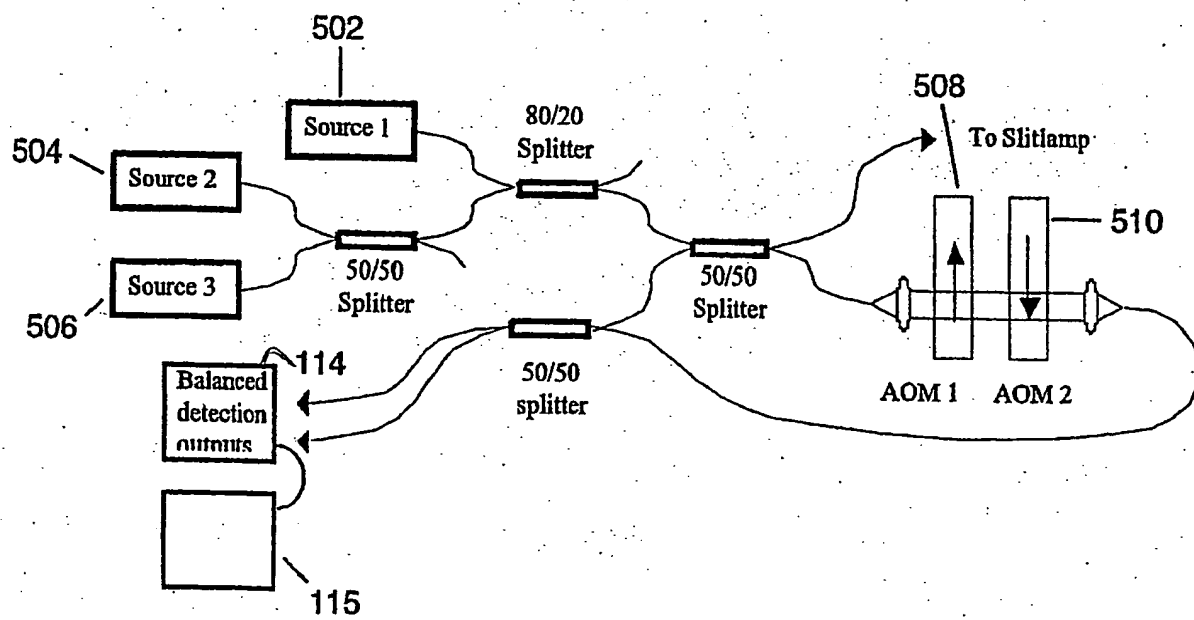


FIG. 11



FIG. 12



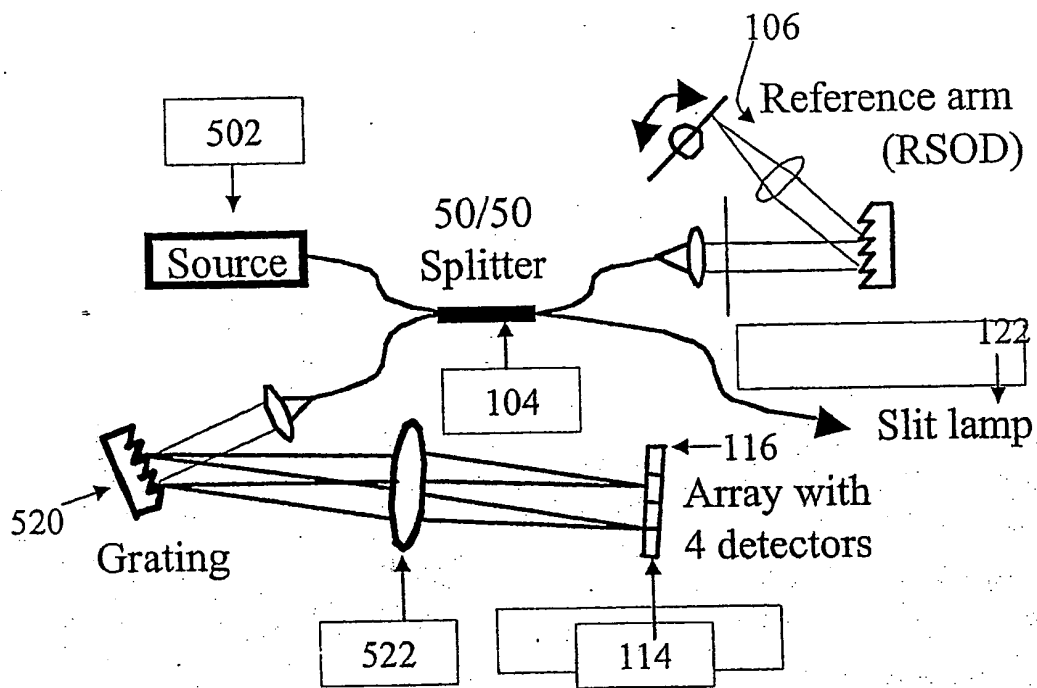
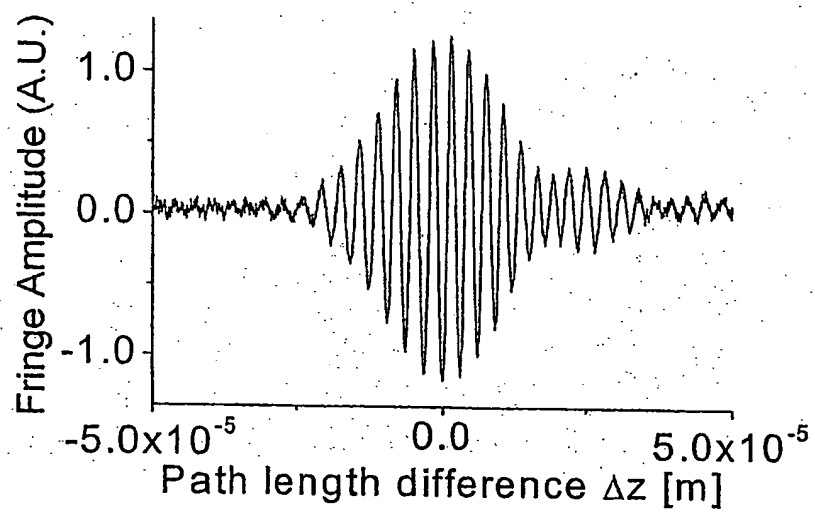


FIG. 13

FIG. 14



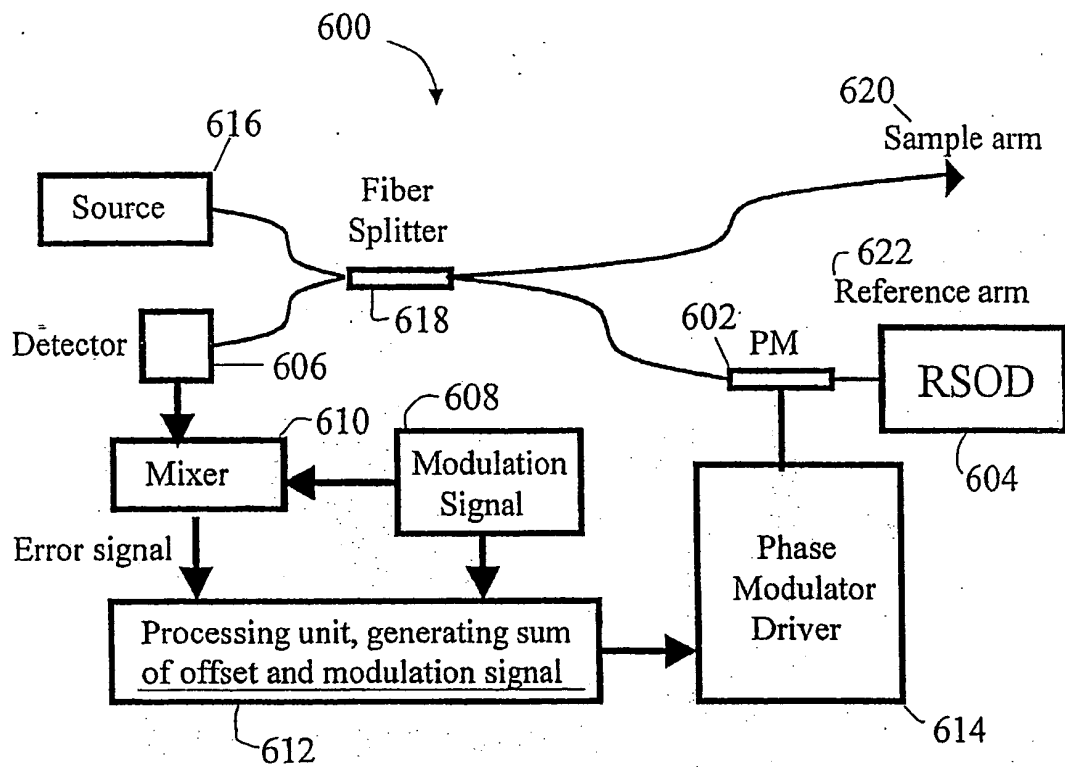


FIG. 15

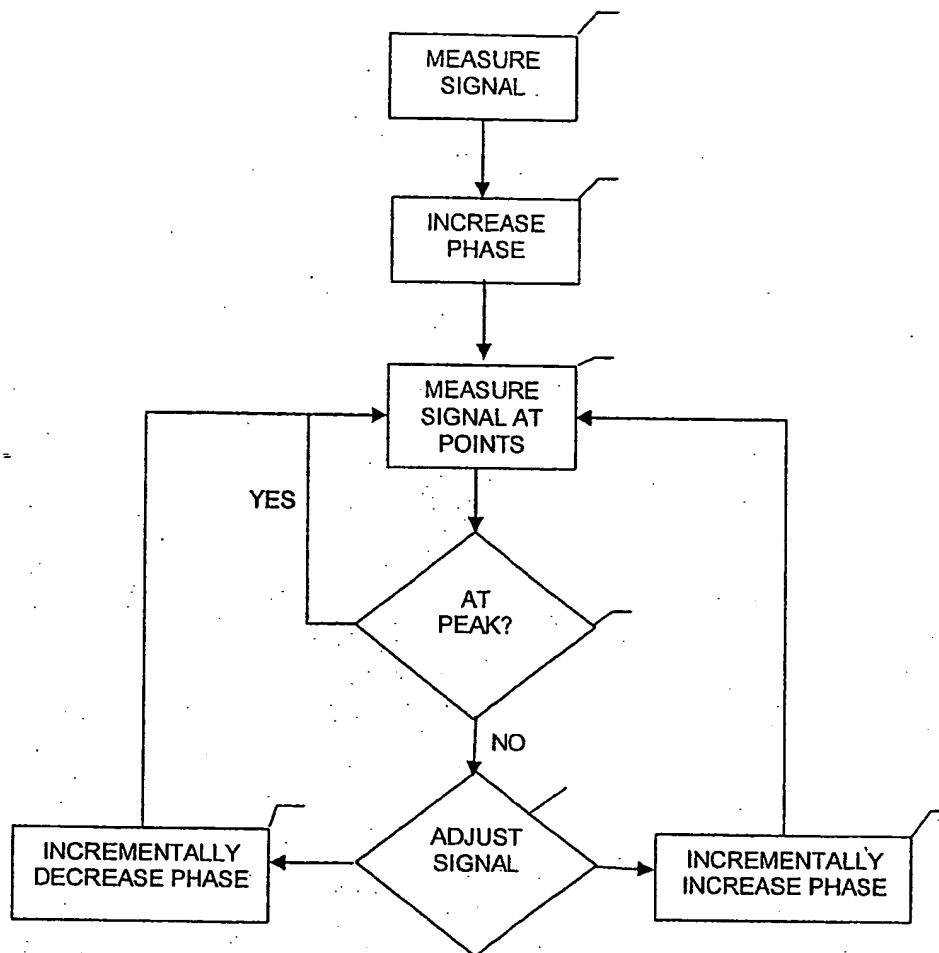


FIG.15A

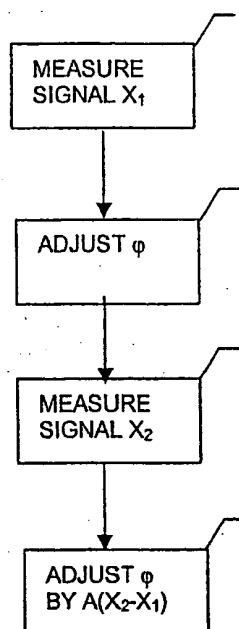


FIG.15B

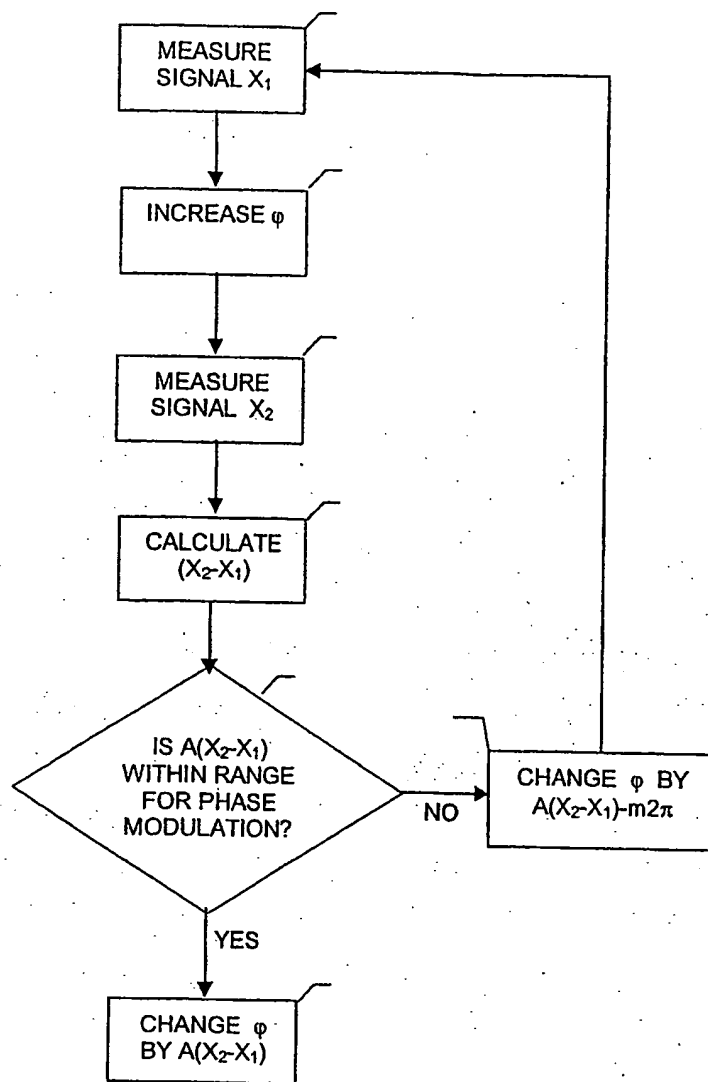


FIG. 15C

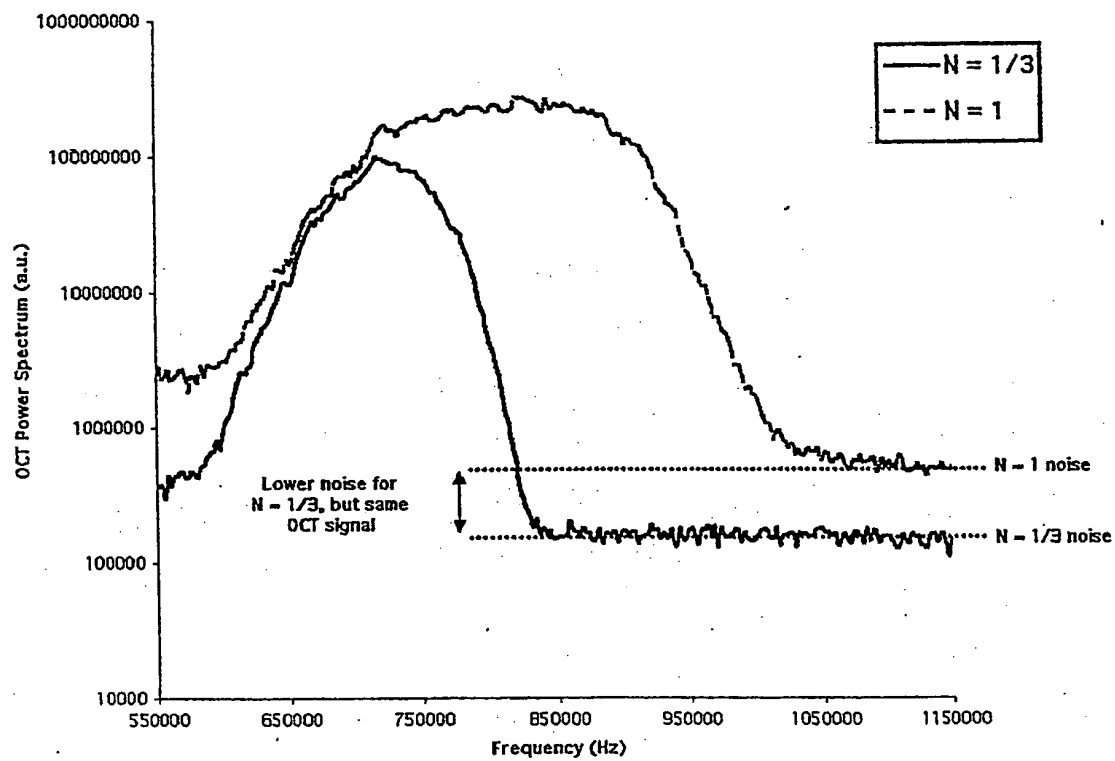


FIG. 16



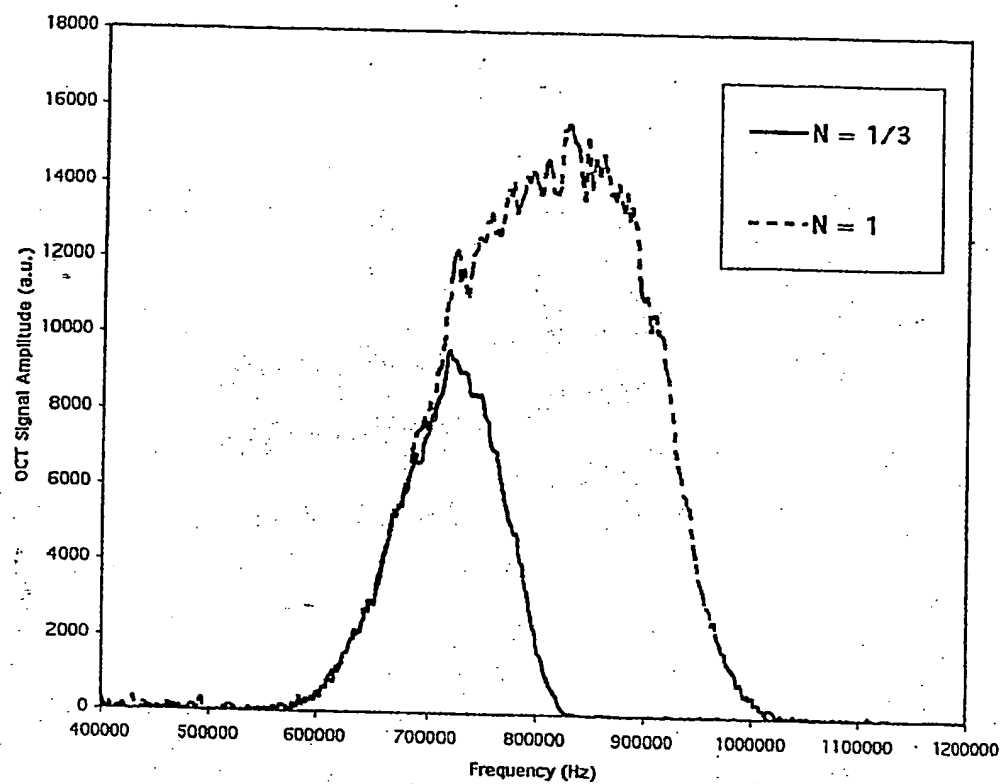


FIG. 17

FIG. 18

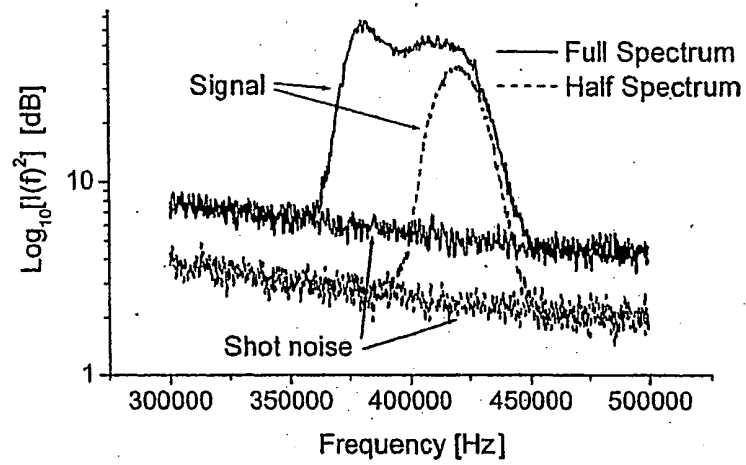


FIG. 19

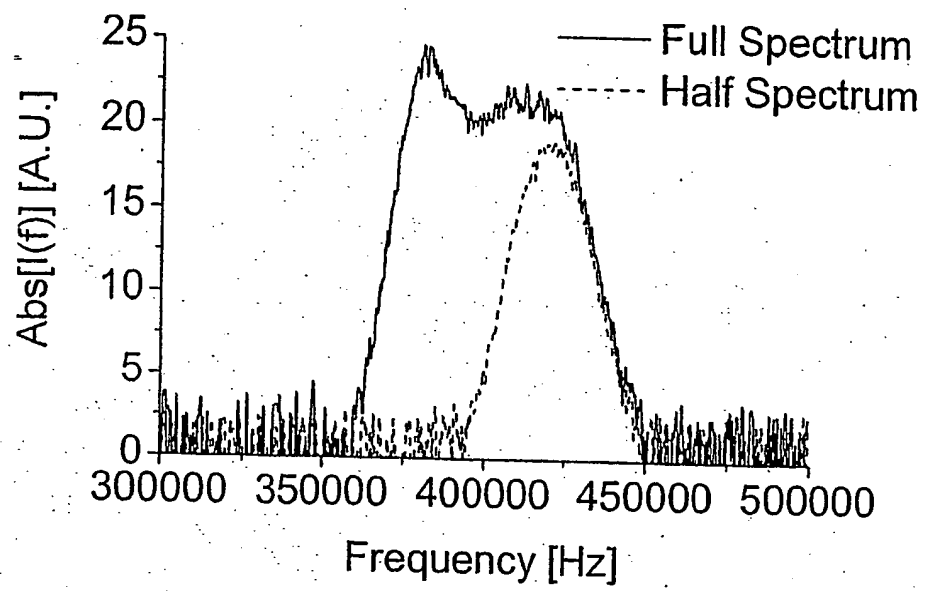


FIG. 20


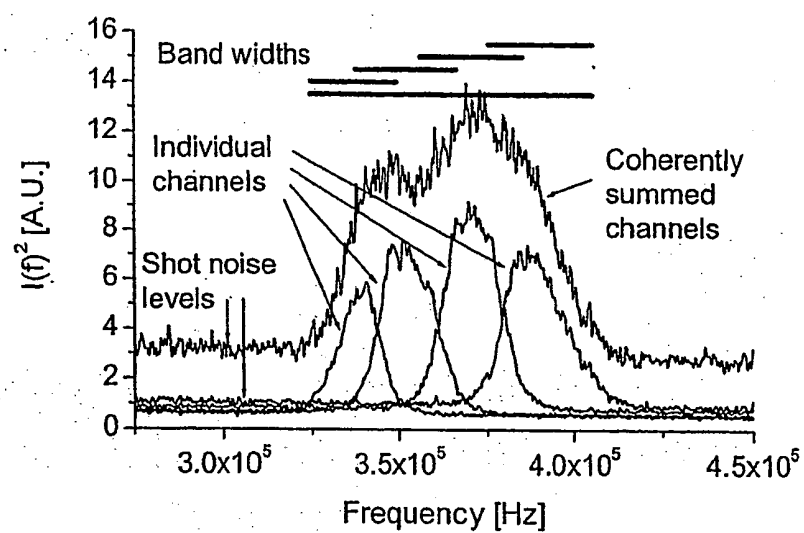


FIG. 21



**THIS PAGE BLANK (USPTO)**

(19) World Intellectual Property Organization  
International Bureau

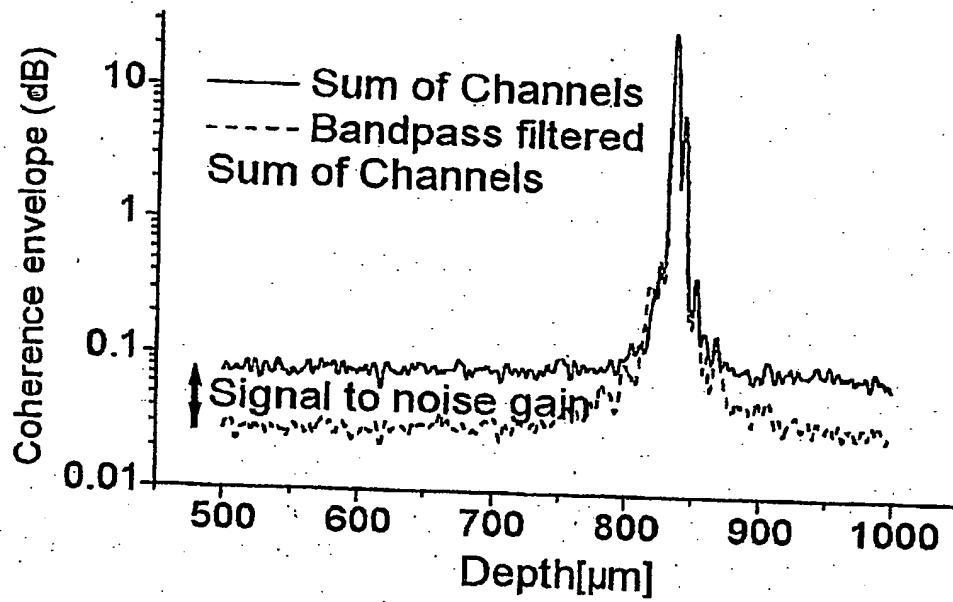

(43) International Publication Date  
31 July 2003 (31.07.2003)

PCT

(10) International Publication Number  
WO 03/062802 A3

(51) International Patent Classification<sup>7</sup>: G01N 21/47,  
A61B 3/00, G01B 9/02, H03L 7/00

(21) International Application Number: PCT/US03/02349

(22) International Filing Date: 24 January 2003 (24.01.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/351,904 24 January 2002 (24.01.2002) US  
10/136,813 30 April 2002 (30.04.2002) US

(71) Applicant (for all designated States except US): THE  
GENERAL HOSPITAL CORPORATION [US/US]; 55  
Fruit Street, Boston, MA 02114 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): DE BOER, Jo-  
hannes, Fitzgerald [US/US]; 60 C Marshall Street,

Somerville, MA 02145 (US). TEARNEY, Guillermo, J.  
[US/US]; 118 Kinnaird Street, #3, Cambridge, MA 02139  
(US). BOUMA, Brett, Eugene [US/US]; 12 Monmouth  
Street, Quincy, MA 02171 (US).


(74) Agent: BERNSTEIN, John A.; Powell, Goldstein, Frazer  
& Murphy LLP, 16th Floor, 191 Peachtree Street, Atlanta,  
GA 30303-1736 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,  
SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN,  
YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: APPARATUS AND METHOD FOR RANGINGS AND NOISE REDUCTION OF LOW COHERENCE INTERFEROMETRY LCI AND OPTICAL COHERENCE TOMOGRAPHY (OCT) SIGNALS BY PARALLEL DETECTION OF SPECTRAL BANDS

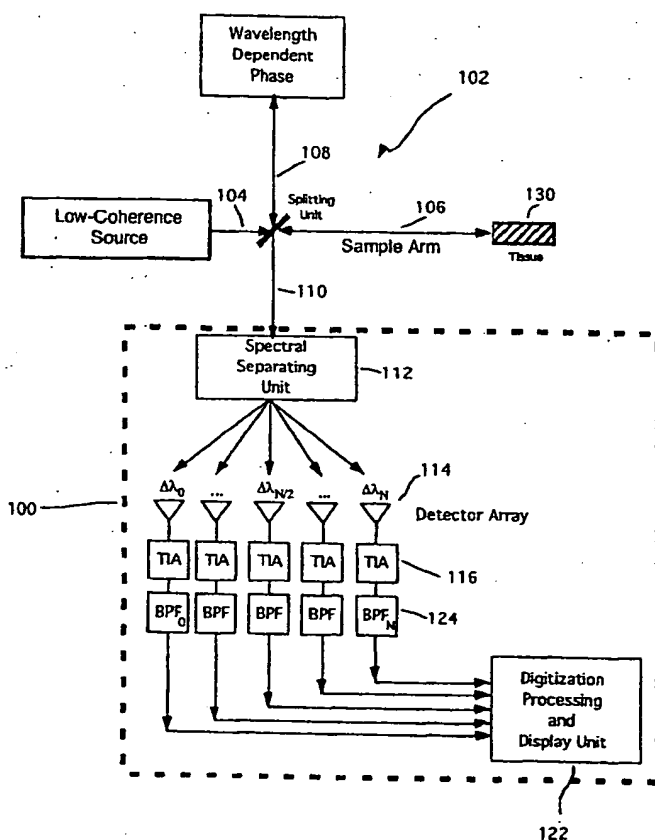

(57) Abstract: Apparatus, method, logic arrangement and storage medium are provided for increasing the sensitivity in the detection of optical coherence tomography and low coherence interferometry ("LCI") signals by detecting a parallel set of spectral bands, each band being a unique combination of optical frequencies. The LCI broad bandwidth source can be split into N spectral bands. The N spectral bands can be individually detected and processed to provide an increase in the signal-to-noise ratio by a factor of N. Each spectral band may be detected by a separate photo detector and amplified. For each spectral band, the signal can be band pass filtered around the signal band by analog electronics and digitized, or, alternatively, the signal may be digitized and band pass filtered in software. As a consequence, the shot noise contribution to the signal is likely reduced by a factor equal to the number of spectral bands, while the signal amplitude can remain the same. The reduction of the shot noise increases the dynamic range and sensitivity of the system.

WO 03/062802 A3



European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(88) Date of publication of the international search report:  
4 December 2003

**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*



According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G01N A61B G01B H03L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 134 003 A (BOPPART STEPHEN A ET AL) 17 October 2000 (2000-10-17) column 16, line 36 -column 17, line 24; figure 16	1-58,71, 101,102
X	US 5 317 389 A (HOCHBERG ERIC B ET AL) 31 May 1994 (1994-05-31) column 5, line 45 -column 6, line 19; claims 1,2; figure 2	1-58,71, 101,102
A	US 6 141 577 A (DELFYETT JR PETER J ET AL) 31 October 2000 (2000-10-31) column 4, line 50 -column 5, line 37; figure 3	1-58,71, 101,102
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the International filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*Z\* document member of the same patent family

Date of the actual completion of the international search

11 September 2003

Date of mailing of the international search report

19.09.03

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Consalvo, D

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	TEARNEY G J ET AL: "IN VIVO ENDOSCOPIC OPTICAL BIOPSY WITH OPTICAL COHERENCE TOMOGRAPHY" SCIENCE, AMERICAN ASSOCIATION FOR THE ADVANCEMENT OF SCIENCE,, US, vol. 276, no. 5321, 27 June 1997 (1997-06-27), pages 2037-2039, XP001041246 ISSN: 0036-8075 figure 1	1-58,71, 101,102
A	WO 99 44089 A (GEN HOSPITAL CORP ;TEARNEY GUILLERMO J (US); BOUMA BRETT E (US); W) 2 September 1999 (1999-09-02) figure 1	1-58,71, 101,102
X	US 4 925 302 A (CUTLER GREGORY M) 15-May 1990 (1990-05-15)  column 5, line 14 -column 6, line 25; figures 3,4	59-69, 85,86, 88-90, 92,93,98
X	US 4 631 498 A (CUTLER GREGORY M) 23 December 1986 (1986-12-23)  claims 1-6; figure 1	59-69, 85,86, 88-90, 92,93,98
A	GB 2 209 221 A (LITTON SYSTEMS INC) 4 May 1989 (1989-05-04)  figure 6	59-69, 85,86, 88-90, 92,93,98
A	US 6 069 698 A (TAKIZAWA HIRONOBU ET AL) 30 May 2000 (2000-05-30)  the whole document	59-69, 85,86, 88-90, 92,93,98
A	US 5 491 552 A (KNUETTEL ALEXANDER) 13 February 1996 (1996-02-13)  column 3, line 41 -column 7, line 62	59-69, 85,86, 88-90, 92,93,98
A	US 5 321 501 A (HUANG DAVID ET AL) 14 June 1994 (1994-06-14)  column 6, line 22 -column 9, line 2; figure 1A	59-69, 85,86, 88-90, 92,93,98

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6134003	A	17-10-2000	US 5748598 A	05-05-1998
			US 5459570 A	17-10-1995
			AU 1977597 A	16-09-1997
			EP 0883793 A1	16-12-1998
			JP 2000503237 T	21-03-2000
			JP 2002214127 A	31-07-2002
			US 6485413 B1	26-11-2002
			US 6111645 A	29-08-2000
			WO 9732182 A1	04-09-1997
			US 6160826 A	12-12-2000
			US 6564087 B1	13-05-2003
			US 6501551 B1	31-12-2002
			US 6282011 B1	28-08-2001
			US 5956355 A	21-09-1999
			US 2001036002 A1	01-11-2001
			WO 9701167 A1	09-01-1997
			US 5784352 A	21-07-1998
			WO 9723870 A1	03-07-1997
			WO 9533970 A1	14-12-1995
			DE 69227902 D1	28-01-1999
			DE 69227902 T2	17-06-1999
			EP 0581871 A1	09-02-1994
			JP 6511312 T	15-12-1994
			WO 9219930 A1	12-11-1992
			US 5465147 A	07-11-1995
			US 5321501 A	14-06-1994
US 5317389	A	31-05-1994	US 5071251 A	10-12-1991
			US 5054924 A	08-10-1991
US 6141577	A	31-10-2000	US 5921926 A	13-07-1999
			US 6072765 A	06-06-2000
WO 9944089	A	02-09-1999	AU 758078 B2	13-03-2003
			AU 2882399 A	15-09-1999
			EP 1057063 A1	06-12-2000
			JP 2002505434 T	19-02-2002
			WO 9944089 A1	02-09-1999
			US 6341036 B1	22-01-2002
			US 2002122246 A1	05-09-2002
US 4925302	A	15-05-1990	NONE	
US 4631498	A	23-12-1986	US 4746878 A	24-05-1988
GB 2209221	A	04-05-1989	NONE	
US 6069698	A	30-05-2000	JP 11072431 A	16-03-1999
			JP 11056752 A	02-03-1999
			JP 11148897 A	02-06-1999
US 5491552	A	13-02-1996	DE 4310209 A1	06-10-1994
			EP 0618439 A1	05-10-1994
US 5321501	A	14-06-1994	US 5465147 A	07-11-1995
			DE 69227902 D1	28-01-1999
			DE 69227902 T2	17-06-1999
			EP 0581871 A1	09-02-1994

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5321501 A		JP 6511312 T	15-12-1994
		US 5459570 A	17-10-1995
		US 6485413 B1	26-11-2002
		US 6111645 A	29-08-2000
		WO 9219930 A1	12-11-1992
		US 6160826 A	12-12-2000
		US 6564087 B1	13-05-2003
		US 6501551 B1	31-12-2002
		US 6282011 B1	28-08-2001
		US 6134003 A	17-10-2000
		US 5956355 A	21-09-1999
		US 2001036002 A1	01-11-2001

**Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)**

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
  
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
  
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

**Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)**

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

**Remark on Protest**

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-58,71,101,102

apparatus for optical imaging employing an interferometer, a spectral separating unit, and a plurality of detectors.

2. Claims: 59-61,62-66,67-68,69,85-86,88,89,90,92,93, and 98

apparatus for optical imaging employing an interferometer, a spectral separating unit, and a plurality of detectors.

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**